


# *Rotabroach*<sup>TM</sup>



**POWER and  
CUTTING Tools**

# Designed in **SHEFFIELD**, used **WORLDWIDE.**

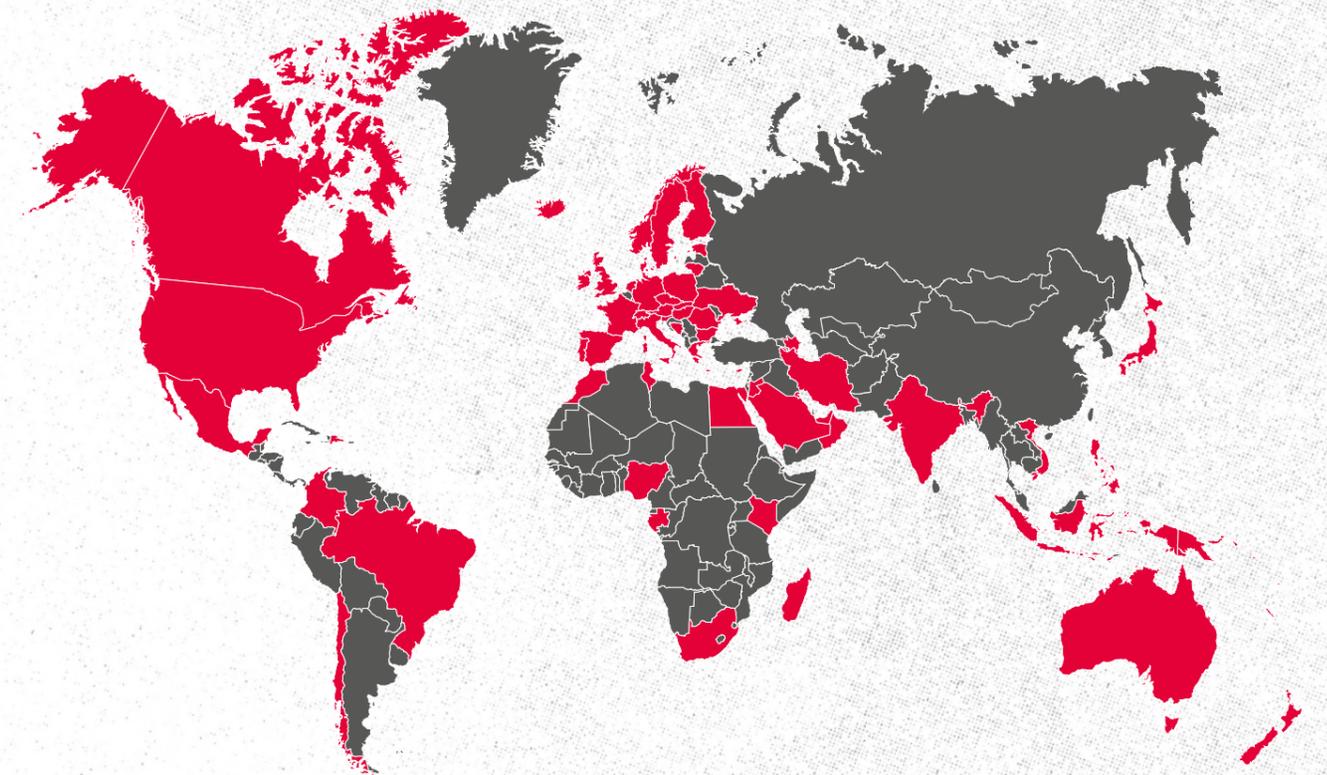

With heritage from 1865, **Rotabroach™** is a trusted name in metalworking, supporting projects worldwide through a strong global network of distribution partners. Known for design innovation and a customer-centric ethos, our **Element™** range has set the standard for professional holemaking, delivering proven reliability in demanding environments.

Today, that engineering heritage drives the next generation of solutions. With innovations such as **SITEH3RO™**, **Rotabroach™** helps professionals work faster, safer and smarter across fabrication, construction and maintenance. **#POWERTOcutMetal - any time, anywhere.**



## POWER TOOLS

<b>ROTABROACH™ MAGNETIC DRILLS.....</b>	<b>06</b>
<b>MAGNETIC DRILL SELECTION CHART .....</b>	<b>07</b>
<b>COMMANDO 35 .....</b>	<b>08</b>
<b>COMMANDO 40 .....</b>	<b>09</b>
<b>ELEMENT™ SERIES MAGNETIC DRILLS .....</b>	<b>10</b>
<b>ELEMENT™ 30.....</b>	<b>12</b>
<b>ELEMENT™ 40.....</b>	<b>13</b>
<b>ELEMENT™ 40 PERMANENT MAGNET.....</b>	<b>14</b>
<b>ELEMENT™ 50.....</b>	<b>15</b>
<b>ELEMENT™ 50 PIVOT MAGNET.....</b>	<b>16</b>
<b>ELEMENT™ 50 AUTOMATIC.....</b>	<b>17</b>
<b>ELEMENT™ 50 LOW PROFILE .....</b>	<b>18</b>
<b>ELEMENT™ 75 .....</b>	<b>20</b>
<b>ELEMENT™ 100 .....</b>	<b>21</b>
<b>SPECIALIST: EAGLE .....</b>	<b>22</b>
<b>SPECIALIST: RAVEN.....</b>	<b>23</b>
<b>SPECIALIST: GATOR.....</b>	<b>24</b>
<b>MAG DRILL ACCESSORIES.....</b>	<b>25</b>
<b>RAIL: RHINO 4.....</b>	<b>28</b>
<b>RAIL: RHINO E.....</b>	<b>29</b>
<b>CHOP SAW AND BLADE RANGE: ELEMENT™ 14.....</b>	<b>30</b>
<b>CHOP SAW AND BLADE RANGE: CERMET BLADES.....</b>	<b>31</b>

## ANNULAR CUTTERS

<b>ANNULAR CUTTERS.....</b>	<b>32</b>
<b>ANNULAR CUTTERS SELECTION CHART .....</b>	<b>33</b>
<b>RAPTOR E™ HSS M2AL .....</b>	<b>34</b>
<b>RAPTOR X™ HSS M2AL .....</b>	<b>36</b>
<b>RAPTOR X+™ HSS M2AL.....</b>	<b>38</b>
<b>RAPTOR T™ CARBIDE TCT .....</b>	<b>40</b>
<b>RAPTOR CTX™ CERMET CARBIDE TCT .....</b>	<b>42</b>
<b>RAPTOR RAIL XR™ .....</b>	<b>44</b>
<b>RAPTOR RAIL TR™ .....</b>	<b>45</b>
<b>ANNULAR CUTTER KITS .....</b>	<b>46</b>

# SITEH3RO™

<b>SITEH3RO™ .....</b>	<b>48</b>
<b>HOLDER .....</b>	<b>50</b>
<b>STEP DRILL .....</b>	<b>52</b>
<b>BOLT EXTRACTOR .....</b>	<b>53</b>
<b>STANDARD TWIST DRILL .....</b>	<b>54</b>
<b>STANDARD TWIST DRILL CORE .....</b>	<b>55</b>
<b>CAR REAMER .....</b>	<b>56</b>
<b>STEP REAMER .....</b>	<b>57</b>
<b>TAP .....</b>	<b>58</b>
<b>STANDARD TWIST DRILL TAP .....</b>	<b>59</b>
<b>KITS .....</b>	<b>60</b>

## POWER TOOL ACCESSORIES

<b>POWER TOOL ACCESSORIES .....</b>	<b>62</b>
<b>POWER TOOL ACCESSORY SELECTION CHART.....</b>	<b>63</b>
<b>CONE DRILLS .....</b>	<b>64</b>
<b>CONECUT™ .....</b>	<b>65</b>
<b>STEP DRILLS .....</b>	<b>66</b>
<b>MULTICUT X™ .....</b>	<b>67</b>
<b>MULTICUT X SPIRAL™ .....</b>	<b>68</b>
<b>MULTICUT X+™ .....</b>	<b>69</b>
<b>MINI CUTTERS AND TCT HOLESAWS .....</b>	<b>70</b>
<b>MINI CUTTERS: STORM.....</b>	<b>71</b>
<b>TCT HOLESAWS.....</b>	<b>72</b>
<b>HSS FABRICATION TOOLING .....</b>	<b>74</b>
<b>COUNTERSINKS .....</b>	<b>75</b>
<b>HEXI-BIT.....</b>	<b>76</b>
<b>THREADING.....</b>	<b>78</b>
<b>POWER TOOL ACCESSORY KITS .....</b>	<b>80</b>

# The ULTIMATE Portable Drilling Solution.



## MAGNETIC DRILL Selection Chart

**Lightweight, powerful and full of features; Rotabroach™ magnetic drills take incredible cutting performance to any site, anywhere.**

MAGNETIC DRILLING SERIES	Cutter Capacity (mm)	Cutter Depth (mm)	Drill Chuck Capacity (mm)	Motor Power (W)	Weight (Kg)	Height (mm)	Arbor	Stroke (mm)	Countersink	Tapping
--------------------------	----------------------	-------------------	---------------------------	-----------------	-------------	-------------	-------	-------------	-------------	---------

The **COMMANDO SERIES** delivers fantastic performance at excellent value.

<b>COMMANDO 35</b>	35mm	50mm	13mm	1200W	11Kg	435mm	Weldon	175mm	⊗	⊗
<b>COMMANDO 40</b>	40mm	50mm	13mm	1100W	14.2Kg	510mm	Weldon	85mm	⊙	⊗

The **ELEMENT™ SERIES** are performance machines designed to increase speed of working and optimise tool life. Fitted with a range of enhanced features, the **ELEMENT™ Mag Drills** are a comprehensive range of machines designed for high volume work and heavy duty applications.

<b>ELEMENT™ 30</b>	32mm	35mm	13mm	850W	12Kg	414mm	Weldon	65mm	⊗	⊗
<b>ELEMENT™ 40</b>	40mm	50mm	13mm	1200W	13Kg	514mm	Weldon	80mm	⊗	⊗
<b>ELEMENT™ 40 PERMANENT MAGNET</b>	40mm	50mm	13mm	1200W	15Kg	514mm	Weldon	80mm	⊙	⊗
<b>ELEMENT™ 50</b>	50mm	50mm	13mm	1500W	15Kg	586mm	MT2	140mm	⊙	⊙
<b>ELEMENT™ 50 PIVOT MAGNET</b>	50mm	50mm	13mm	1500W	18Kg	640mm	Weldon	150mm	⊙	⊙
<b>ELEMENT™ 50 LOW PROFILE</b>	50mm	50mm	N/A	1200W	11Kg	179mm	Weldon	62mm	⊙*	⊗
<b>ELEMENT™ 50 AUTOMATIC</b>	50mm	50mm	20mm	1500W	18.5Kg	586mm	MT2	140mm	⊙	⊙
<b>ELEMENT™ 75</b>	75mm	75mm	16mm	1800W	23Kg	713mm	MT3	185mm	⊙	⊙
<b>ELEMENT™ 100</b>	100mm	100mm	16mm	2000W	25Kg	733mm	MT3	200mm	⊙	⊙

\*Requires an extension arbor RD32059.

The **SPECIALIST SERIES** are designed for specialist applications, this series caters for both semi-autonomous drilling applications and 'anti-spark' environments, with both a hydraulic and pneumatic drilling option.

<b>EAGLE</b>	52mm	50mm	16mm	6.9 Bar Max Pneumatic	21Kg	560mm	Weldon	70mm	⊗	⊗
<b>RAVEN</b>	52mm	50mm	16mm	6.9 Bar Max Pneumatic	16Kg	525mm	Weldon	70mm	⊗	⊗
<b>GATOR</b>	52mm	50mm	16mm	140 Bar Hydraulic	23Kg	520mm	Weldon	70mm	⊗	⊗

## COMMANDO 35 Magnetic Drill

# COMMANDO 35



**Robust,  
powerful drilling,  
from workshop  
to worksite.**

### SPECIFICATIONS:

Cutter Capacity	35mm
Depth of Cut	50mm
Drill Chuck Capacity	13mm
No Load Speed	650RPM
Motor Specification	1200W
Magnet Adhesion	10000N
Length	245mm
Height	435mm
Width	155mm
Magnet Size	160 x 80mm
Weight	11kg
Motor	110/230V
Stroke	175mm

### KEY SPECIFICATIONS:



**Cutter Capacity  
35mm**



**Depth of Cut  
50mm**



**Twist Drill Capacity  
13mm**



**Weight  
11Kg**



**10000N  
Magnet Adhesion**



**1200W  
Motor**

### KEY FEATURES:



**Thermal Overload  
PROTECTION**

Designed to shut down in cases of excessive heat generation, protecting your motor and machine.

**INCLUDED:**  
Carry Case; Drill Chuck; Hex Keys; Safety Strap; Guard; Integrated Coolant System

PART CODE: *Commando 35X/1 (110V), Commando 35X/3 (230V)*

## COMMANDO 40 Magnetic Drill

# COMMANDO 40



**High performance  
on any budget,  
featuring 6-speed  
flexibility.**


### SPECIFICATIONS:

Cutter Capacity	40mm
Depth of Cut	50mm
Drill Chuck Capacity	13mm
Countersink	30mm
No Load Speed	270 - 610RPM
Motor Specification	1100W
Magnet Adhesion	8000N
Length	265mm
Height	510mm
Width	180mm
Magnet Size	165 x 80mm
Weight	14.2kg
Motor	110/230V
Stroke	85mm

### KEY SPECIFICATIONS:



**Cutter Capacity  
40mm**



**Depth of Cut  
50mm**



**Twist Drill Capacity  
13mm**



**Weight  
14.2Kg**



**8000N  
Magnet Adhesion**



**Countersink  
Capacity  
30mm**

### KEY FEATURES:



**Variable  
SPEED**

6 electronic speed settings, ideal for larger diameter cutting, countersinking and twist drills, providing maximum versatility.



**Thermal Overload  
PROTECTION**

Designed to shut down in cases of excessive heat generation, protecting your motor and machine.

**INCLUDED:**  
Carry Case; Drill Chuck; Hex Keys; Safety Strap; Guard; Integrated Coolant System

PART CODE: *Commando 40/1 (110V), Commando 40/3 (230V)*



**INTERNAL Coolant System**



**INTERNAL Cabling**



**QUICK RELEASE Interchangeable Handle**



**CUTSMART Technology**



**MAGNETIC Detection**



# ELEMENT™

## POWER performance. POWER the way you work with metal.

### FEATURES available in the series:

#### CUT SMART

Safe and efficient working with our integrated LED digital panel display. It shows machine load, prolongs machine life and allows instant restarts after cutting out.

#### Internal CABLING

Designed to minimize the risk of machine damage, our internal cabling design is essential to prevent potential magnetic drill downtime, keeping you working for longer.

#### QUICK Release Interchangeable Handle

Effortless convenience with our tool-free, quick-release interchangeable handle. Designed to quickly, easily adjust to tight angles and difficult environments.

#### MAGNETIC Detection

Detects unsafe levels of magnetic adhesion, providing a visual notification to the user of unsafe adhesion levels through a colour changing system.

#### PERMA MAG

Fitted with patented permanent magnet technology, the machine will be safely magnetised on material just 3mm thick and stay adhered even if the power is cut, protecting the user and machine.

#### AUTO Function

Featuring fully automatic drilling, this machine drills the hole, retracts and powers off – ready to be moved safely on to the next hole.

#### Swivel BASE

This is an add-on feature on the Element™ 100 & 75 and allows the machine to be rotated up to 30 degrees, left or right and adjusted up to 10mm forwards and backwards.

#### Variable SPEED

24 speeds available for maximum versatility for threading, countersinking and large diameter drilling.

#### Electronic Overload PROTECTION

Designed to protect the user and machine from being overloaded, maximising product life and user safety.

#### 2 Speed GEARBOX

Ideal for optimal speed changes on HSS and TCT Cutters.

#### 4 Speed GEARBOX

Ideal for high capacity drilling applications for maximum performance.

#### Ideal for PIPE

Designed for drilling pipes with a minimum diameter of 89mm width and standard magnetic drilling applications.

**ELEMENT™ 30 Magnetic Drill**

# ELEMENT™ 30

**Lightweight,  
feature-rich and  
reliable.**

**CUT SMART** **MAGNETIC Detection**

**Internal CABLING** **QUICK Release Interchangeable Handle**



**ELEMENT™ 40 Magnetic Drill**

# ELEMENT™ 40

**Ideal for HSS,  
TCT and all-round  
drilling.**

**CUT SMART** **MAGNETIC Detection**

**Internal CABLING** **QUICK Release Interchangeable Handle** **2 Speed GEARBOX**



**SPECIFICATIONS:**

Cutter Capacity	32mm
Depth of Cut	35mm
Twist Drill Capacity	13mm
Drill Chuck Capacity	13mm
No Load Speed	600RPM
Motor Specification	850W
Magnet Adhesion	10000N
Length	270mm
Height	414mm
Width	165mm
Magnet Size	180 x 90mm
Weight	12kg
Motor	110/230V
Stroke	65mm

**KEY SPECIFICATIONS:**

  
**Cutter Capacity  
32mm**

  
**Depth of Cut  
35mm**

  
**Twist Drill Capacity  
13mm**

  
**Weight  
12Kg**

  
**10000N  
Magnet Adhesion**

  
**850W  
Motor**

**KEY FEATURES:**

- **CUTSMART Technology** for safe and efficient working
- **Tool-free QUICK Release interchangeable handle**
- **Minimise machine damage and prevent magnetic drill downtime with Internal CABLING**
- **Detect unsafe levels of magnetic adhesion with MAGNETIC Detection**

**INCLUDED:**  
Carry Case; Internal Coolant System; Safety Strap; 4mm A/F Tee Handled Hexagon Key; 3mm Hexagon Key; 6mm Hexagon Key; Drill Chuck Adaptor; Drill Chuck and Key; Safety Glasses

PART CODE: Element 30/1 (110V), Element 30/3 (230V)

**SPECIFICATIONS:**

Cutter Capacity	40mm
Depth of Cut	50mm
Twist Drill Capacity	13mm
Drill Chuck Capacity	13mm
No Load Speed	300 - 600RPM
Motor Specification	1200W
Magnet Adhesion	10000N
Length	285mm
Height	514mm
Width	185mm
Magnet Size	180 x 90mm
Weight	13kg
Motor	110/230V
Stroke	80mm

**KEY SPECIFICATIONS:**

  
**Cutter Capacity  
40mm**

  
**Depth of Cut  
50mm**

  
**Twist Drill Capacity  
13mm**

  
**Weight  
13Kg**

  
**10000N  
Magnet Adhesion**

  
**1200W  
Motor**

**KEY FEATURES:**

- **CUTSMART Technology** for safe and efficient working
- **Tool-free QUICK Release interchangeable handle**
- **Minimise machine damage and prevent magnetic drill downtime with Internal CABLING**
- **Detect unsafe levels of magnetic adhesion with MAGNETIC Detection**
- **2 Speed GEARBOX ideal for optimal speed changes on HSS and TCT cutters**

**INCLUDED:**  
Carry Case; Internal Coolant System; Safety Strap; 4mm A/F Tee Handled Hexagon Key; 3mm Hexagon Key; 6mm Hexagon Key; Drill Chuck Adaptor; Drill Chuck and Key; Safety Glasses

PART CODE: Element 40/1 (110V), Element 40/3 (230V)

**ELEMENT™ 40 Permanent Magnet  
Magnetic Drill**

**ELEMENT™ 40  
Permanent Magnet**

**Keeping you  
safe, even if the  
power goes out.**



**CUTSMART PERMAMAG**

**Internal CABLING** **QUICK Release Interchangeable Handle** **2 Speed GEARBOX**

**SPECIFICATIONS:**

Cutter Capacity	40mm
Depth of Cut	50mm
Twist Drill Capacity	13mm
Drill Chuck Capacity	13mm
Countersink	30mm
No Load Speed	300-600RPM
Motor Specification	1200W
Magnet Adhesion	5000N
Length	285mm
Height	514mm
Width	185mm
Magnet Size	210 x 90mm
Weight	13KG
Motor	110/230V
Stroke	85mm

**KEY SPECIFICATIONS:**

**Cutter Capacity 40mm**

**Depth of Cut 50mm**

**Twist Drill Capacity 13mm**

**Weight 13Kg**

**5000N Magnet Adhesion**

**Countersink Capacity 30mm**

**KEY FEATURES:**

- **PERMAMAG** technology ensures the magnet stays permanent when the power cuts out
- **CUTSMART Technology** for safe and efficient working
- Minimise machine damage and prevent magnetic drill downtime with **Internal CABLING**
- **2 Speed GEARBOX** ideal for optimal speed changes on HSS and TCT cutters
- Tool-free **QUICK Release** interchangeable handle

**INCLUDED:**

Carry Case; Internal Coolant System; Safety Strap; 4mm A/F Tee Handled Hexagon Key; 3mm Hexagon Key; 6mm Hexagon Key; Drill Chuck Adaptor; Drill Chuck and Key; Safety Glasses

PART CODE: **Element 40/1PERM (110V), Element 40/3PERM (230V)**

**ELEMENT™ 50 Magnetic Drill**

**ELEMENT™ 50**

**Large capacity  
drilling, countersinking  
and tapping – all in  
one machine.**



**CUTSMART Electronic Overload PROTECTION 2 Speed GEARBOX**

**Internal CABLING** **QUICK Release Interchangeable Handle** **MAGNETIC Detection** **Variable SPEED**

**SPECIFICATIONS:**

Cutter Capacity	50mm
Depth of Cut	50mm
Twist Drill Capacity	20mm
Drill Chuck Capacity	13mm
Morse Taper	MT2
Countersink	30mm
Tapping	M20
No Load Speed	100 - 500RPM
Motor Specification	1500W
Magnet Adhesion	13500N
Length	315mm
Height	586mm
Width	195mm
Magnet Size	200 x 98mm
Weight	15kg
Motor	110/230V
Stroke	140mm

**KEY SPECIFICATIONS:**

**Cutter Capacity 50mm**

**Depth of Cut 50mm**

**Twist Drill Capacity 20mm**

**Weight 15Kg**

**13500N Magnet Adhesion**

**Countersink Capacity 30mm**

**KEY FEATURES:**

- **CUTSMART Technology** for safe and efficient working
- Fitted with **ELECTRONIC** overload protection
- Minimise machine damage and prevent magnetic drill downtime with **Internal CABLING**
- Tool-free **QUICK Release** interchangeable handle
- Detect unsafe levels of magnetic adhesion with **MAGNETIC Detection**
- **Variable SPEED** for larger diameter cutting, providing maximum versatility
- **2 Speed GEARBOX** ideal for optimal speed changes on HSS and TCT cutters

**INCLUDED:**

Carry Case; Internal Coolant System; 13mm Chuck; Arbor Assembly - 6mm Hexagonal Spanner; Safety Glasses; Arbor Shank; Drift; Safety Strap; 3mm Hexagonal Spanner; Stationary Rings; Pilot Pin

PART CODE: **Element 50/1 (110V), Element 50/3 (230V)**

## ELEMENT™ 50 Pivot Magnet Magnetic Drill

# ELEMENT™ 50 Pivot Magnet

Lightweight,  
feature-rich and  
reliable.

**CUTSMART**  **Electronic Overload PROTECTION** 

**Internal CABLING**  **PERMAMAG**  **QUICK Release Interchangeable Handle** 

**2 Speed GEARBOX**  **Variable SPEED**  **Ideal for PIPE** 



## ELEMENT™ 50 Automatic Magnetic Drill

# ELEMENT™ 50 Automatic

Ideal for HSS,  
TCT and all-round  
drilling.

**CUTSMART**  **Electronic Overload PROTECTION** 

**Internal CABLING**  **QUICK Release Interchangeable Handle**  **MAGNETIC Detection** 

**AUTO Function**  **2 Speed GEARBOX**  **Variable SPEED** 



### SPECIFICATIONS:

Cutter Capacity	50mm
Depth of Cut	50mm
Twist Drill Capacity	20mm
Drill Chuck Capacity	13mm
Morse Taper	MT2
Countersink	30mm
Tapping	M20
No Load Speed	100-500RPM
Motor Specification	1500W
Magnet Adhesion	8430N
Length	317mm
Height	640mm
Width	190mm
Magnet Size	277 x 190mm
Weight	18kg
Motor	110/230V
Stroke	150mm

### KEY SPECIFICATIONS:

  
**Cutter Capacity**  
**50mm**

  
**Depth of Cut**  
**50mm**

  
**Twist Drill Capacity**  
**20mm**

  
**Weight**  
**18Kg**

  
**8430N**  
**Magnet Adhesion**

  
**Countersink**  
**Capacity 30mm**

### KEY FEATURES:

- Ideal for PIPE with a minimum diameter of 89mm
- CUTSMART Technology for safe and efficient working.
- Fitted with ELECTRONIC overload protection
- Minimise machine damage and prevent magnetic drill downtime with Internal CABLING
- 2 Speed GEARBOX ideal for optimal speed changes on HSS and TCT cutters
- Tool-free QUICK Release interchangeable handle
- PERMAMAG technology ensures the magnet stays permanent when the power cuts out
- Variable SPEED for larger diameter cutting, providing maximum versatility

#### INCLUDED:

Carry Case; Internal Coolant System; 13mm Chuck; Arbor Assembly - 6mm Hexagonal Spanner; Safety Glasses; Arbor Shank; Drift; Safety Strap; 3mm Hexagonal Spanner; Stationery Rings; Pilot Pin

PART CODE: Element 50/IPM (110V), Element 50/3PM (230V)

### SPECIFICATIONS:

Cutter Capacity	50mm
Depth of Cut	50mm
Twist Drill Capacity	20mm
Drill Chuck Capacity	13mm
Morse Taper	MT2
Countersink	30mm
Tapping	M20
No Load Speed	100-500RPM
Motor Specification	1500W
Magnet Adhesion	13500N
Length	395mm
Height	586mm
Width	255mm
Magnet Size	200 x 98mm
Weight	18.5KG
Motor	110/230V
Stroke	140mm

### KEY SPECIFICATIONS:

  
**Cutter Capacity**  
**50mm**

  
**Depth of Cut**  
**50mm**

  
**Twist Drill Capacity**  
**20mm**

  
**Weight**  
**18.5Kg**

  
**13500N**  
**Magnet Adhesion**

  
**Countersink**  
**Capacity 30mm**

### KEY FEATURES:

- AUTO Function fully automatic drilling
- CUTSMART Technology for safe and efficient working
- Fitted with ELECTRONIC overload protection
- Minimise machine damage and prevent magnetic drill downtime with Internal CABLING
- 2 Speed GEARBOX ideal for optimal speed changes on HSS and TCT cutters
- Tool-free QUICK Release interchangeable handle
- Detect unsafe levels of magnetic adhesion with MAGNETIC Detection
- Variable SPEED for larger diameter cutting, providing maximum versatility

#### INCLUDED:

Carry Case; Internal Coolant System; 13mm Chuck; Arbor Assembly - 6mm Hexagonal Spanner; Safety Glasses; Arbor Shank; Drift; Safety Strap; 3mm Hexagonal Spanner; Stationery Rings; Pilot Pin

PART CODE: Element 50/1AUTO (110V), Element 50/3AUTO (230V)

ELEMENT™ 50 Low Profile Magnetic Drill

# ELEMENT™ 50

Low Profile

**Maximum Performance, Minimum Size; The ELEMENT™ 50 Low Profile is the largest capacity low profile drill on the market.**

**With 1200W motor and 6 speeds, its small in height, but big in capacity. Fitted with CUTSMART technology to maximise performance of the machine and cutting tool life, the Low Profile has the power to transform how you work on site.**



ELEMENT™ 50 Low Profile Magnetic Drill



**CUT SMART** **Internal CABLING** **QUICK Release Interchangeable Handle** **MAGNETIC Detection** **Variable SPEED**

### SPECIFICATIONS:

Cutter Capacity	50mm
Depth of Cut	50mm
Countersink	30mm*
No Load Speed	250-500RPM
Motor Specification	1200W
Magnet Adhesion	10000N
Length	334mm
Height	179mm
Width	100mm
Magnet Size	192 x 82mm
Weight	11kg
Motor	110/230V
Stroke	62mm

\*Requires an extension arbor RD32059.

### KEY SPECIFICATIONS:

**Cutter Capacity**  
**50mm**

**Depth of Cut**  
**50mm**

**1200W**  
Motor

**Weight**  
**11Kg**

**10000N**  
Magnet Adhesion

**Countersink**  
Capacity  
**30mm\***

### KEY FEATURES:

- **CUTSMART Technology** for safe and efficient working
- **Minimise machine damage and prevent magnetic drill downtime with Internal CABLING**
- **Tool-free QUICK Release interchangeable handle**
- **Detect unsafe levels of magnetic adhesion with MAGNETIC Detection**
- **Variable SPEED** for larger diameter cutting, providing maximum versatility

### INCLUDED:

**Carry Case; Fixed Guard; Safety Strap; Coolant bottle; 4mm Hexagonal Wrench; coolant Bottle; Ratchet Handle; Safety Strap; Safety Glasses**

**PART CODE: Element 50 LOWPROFILE 1 (110V), Element 50 LOWPROFILE 3 (230V)**

## ELEMENT™ 75 Magnet Magnetic Drill

# ELEMENT™ 75

High capacity drilling,  
with 12 forward and  
reverse speeds.



### SPECIFICATIONS:

Cutter Capacity	75mm
Depth of Cut	75mm
Twist Drill Capacity	26mm
Drill Chuck Capacity	16mm
Morse Taper	MT3
Countersink	40mm
Tapping	M24
No Load Speed	70 -500RPM
Motor Specification	1800W
Magnet Adhesion	18500N
Length	375mm
Height	713mm
Width	214mm
Magnet Size	220 x 114mm
Weight	23kg
Motor	110/230V
Stroke	185mm

### KEY SPECIFICATIONS:



### KEY FEATURES:

- **CUTSMART** Technology for safe and efficient working
- Fitted with **ELECTRONIC** overload protection
- Minimise machine damage and prevent magnetic drill downtime with **Internal CABLING**
- Tool-free **QUICK** Release interchangeable handle
- Detect unsafe levels of magnetic adhesion with **MAGNETIC** Detection
- **Variable** **SPEED** for larger diameter cutting, providing maximum versatility
- **2 Speed** **GEARBOX** ideal for optimal speed changes on HSS and TCT cutters

#### INCLUDED:

Carry Case; Internal Coolant System; 16mm Chuck; Arbor Assembly - 6mm Hexagonal Spanner; Safety Glasses; Arbor Shank; Drift; Safety Strap; 3mm Hexagonal Spanner; Stationery Rings; Pilot Pin

PART CODE: Element 75/1 (110V), Element 75/3 (230V)

## ELEMENT™ 100 Magnetic Drill

# ELEMENT™ 100

The ultimate  
high-power  
drilling solution.



### SPECIFICATIONS:

Cutter Capacity	100mm
Depth of Cut	100mm
Twist Drill Capacity	32mm
Drill Chuck Capacity	16mm
Morse Taper	MT3
Countersink	40mm
Tapping	M30
No Load Speed	45 -700RPM
Motor Specification	2000W
Magnet Adhesion	20000N
Length	370mm
Height	733mm
Width	230mm
Magnet Size	228 x 114mm
Weight	25kg
Motor	110/230V
Stroke	200mm

### KEY SPECIFICATIONS:



### KEY FEATURES:

- **CUTSMART** Technology for safe and efficient working
- Fitted with **ELECTRONIC** overload protection
- Minimise machine damage and prevent magnetic drill downtime with **Internal CABLING**
- Tool-free **QUICK** Release interchangeable handle
- Detect unsafe levels of magnetic adhesion with **MAGNETIC** Detection
- **Variable** **SPEED** for larger diameter cutting, providing maximum versatility
- **4 Speed** **GEARBOX** ideal for optimal speed changes on HSS and TCT cutters

#### INCLUDED:

Carry Case; Internal Coolant System; 16mm Chuck; Arbor Assembly - 6mm Hexagonal Spanner; Safety Glasses; Arbor Shank; Drift; Safety Strap; 3mm Hexagonal Spanner; Stationery Rings; Pilot Pin

PART CODE: Element 100/1 (110V), Element 100/3 (230V)

Specialist: **EAGLE** Pneumatic Magnetic Drill

# EAGLE

A powerful pneumatic mag drill, manufactured from ZA12 alloy anti-spark material for use in hazardous areas.



Specialist: **RAVEN** Pneumatic Magnetic Drill

# RAVEN

A tough, lightweight, and versatile pneumatic mag drill, designed for use in non-corrosive atmospheres.



### SPECIFICATIONS:

Cutter Capacity	52mm
Depth of Cut	50mm
Drill Chuck Capacity	16mm
No Load Speed	270RPM
Motor Specification	28cfm
Magnet Adhesion	7000N
Length	370mm
Height	540mm
Width	175mm
Magnet Size	165 x 80mm
Weight	21kg
Stroke	70mm

### KEY SPECIFICATIONS:

 **Cutter Capacity 52mm**

 **Depth of Cut 50mm**

 **7000N Magnet Adhesion**

 **Weight 21Kg**

### KEY FEATURES:

- Manufactured from ZA12 alloy anti-spark material
- Ideal in corrosive and hazardous areas
- Fully ATEX approved to EXII 2GDe T6 IIC T85°C

### INCLUDED:

- Safety Strap;
- Hexagon Spanner 4mm;
- Hexagon Spanner 3mm;
- Pipe Fixing Strap

PART CODE: **RD130C**

### SPECIFICATIONS:

Cutter Capacity	52mm
Depth of Cut	50mm
No Load Speed	270RPM
Motor Specification	28cfm
Magnet Adhesion	7000N
Length	315mm
Height	540mm
Width	160mm
Magnet Size	165 x 80mm
Weight	16kg
Stroke	70mm

### KEY SPECIFICATIONS:

 **Cutter Capacity 52mm**

 **Depth of Cut 50mm**

 **7000N Magnet Adhesion**

 **Weight 16Kg**

### KEY FEATURES:

- Mechanically activated magnet
- For use on pneumatic supplies in non-corrosive atmospheres
- Fully ATEX approved to EXII 2GDe T6 IIC T85°C

### INCLUDED:

- Safety Strap;
- Hexagon Spanner 4mm;
- Hexagon Spanner 3mm;
- Pipe Fixing Strap

PART CODE: **CM/330/C**

Specialist: GATOR Hydraulic Magnetic Drills

# GATOR

**A mechanically activated magnetic base. The Gator is used in applications where hydraulic supplies are the most convenient or necessary.**



**SPECIFICATIONS:**

Cutter Capacity	52mm
Depth of Cut	50mm
Drill Chuck Capacity	16mm
No Load Speed	630RPM
Motor Specification	140bar
Magnet Adhesion	7000N
Length	320mm
Height	520mm
Width	160mm
Magnet Size	165 x 80mm
Weight	23kg
Stroke	70mm

**KEY SPECIFICATIONS:**



**Cutter Capacity**  
**52mm**



**Depth of Cut**  
**50mm**



**7000N**  
**Magnet Adhesion**



**Weight**  
**23Kg**

**KEY FEATURES:**

- A powerful tool designed for precision and efficiency
- Hydraulic system ensuring optimal performance
- Tackle heavy duty drilling tasks at ease with a 52mm cutter capacity

**INCLUDED:**

- Safety Strap;
- Hexagon Spanner 4mm;
- Hexagon Spanner 3mm;
- Pipe Fixing Strap

PART CODE: RD140


MAG DRILL ACCESSORIES

# MAG DRILL Accessories

Getting the **MOST** from your **MACHINES**



**COUNTERSINKS:**

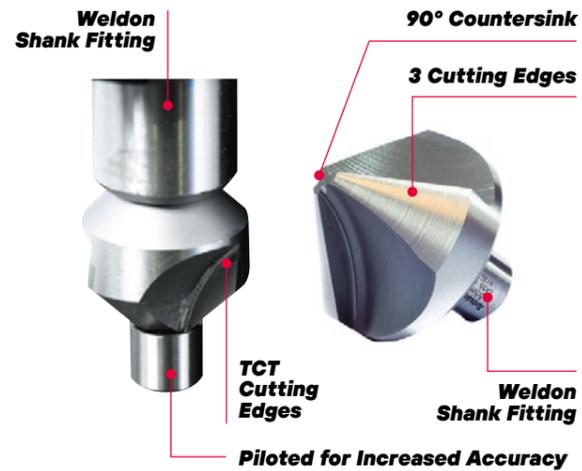

- Weldon Shank Countersinks available in HSS M2AL or with Tungsten Carbide Tips for harder wear materials.
- For best countersinking results always use coolant and a variable speed machine to ensure best tool performance.

Part Number	Product Description
CK30	HSS M2AL Countersink upto 30mm diameter holes
CK40	HSS M2AL Countersink upto 40mm diameter holes
CK55	HSS M2AL Countersink upto 55mm diameter holes

Part Number	Product Description
RPCC201	Tungsten Carbide Tipped Countersink up to 40mm diameter holes
RPCC100	Tungsten Carbide Kit Includes pilots for 14, 18 & 22mm holes

**TWIST DRILLS:**



- M42 Twist Drills with weldon shanks ideal for smaller diameter drilling with magnetic drills.
- No requirement for chucks, simply put straight into the magnetic drill.
- Suitable for materials up to <math>900N/MM^2</math> such as Stainless Steel and Rail Track.

Part Number	DIA	D.O.C	Product Description
RRTW060	6mm	25mm	6mm M42 Weldon Shank Twist Drill
RRTW070	7mm	25mm	7mm M42 Weldon Shank Twist Drill
RRTW080	8mm	25mm	8mm M42 Weldon Shank Twist Drill
RRTW090	9mm	25mm	9mm M42 Weldon Shank Twist Drill
RRTW100	10mm	25mm	10mm M42 Weldon Shank Twist Drill
RRTW110	11mm	25mm	11mm M42 Weldon Shank Twist Drill
RRTW120	12mm	25mm	12mm M42 Weldon Shank Twist Drill
RRTW130	13mm	25mm	13mm M42 Weldon Shank Twist Drill

**CUTTER ADAPTORS:**

**NITTO Universal Cutter Adaptor**

**Fein Quick-in-Shank**

**NITTO Threaded Adaptor**



Use the cutter adaptors to allow you to fit Rotabroach™ cutters in other non-weldon shank accepting magnetic drills.

Part Number	Product Description
CQA01	Fein Quick-In Shank
CQA02	One-Touch Shank
CQA03	Nitto Threaded Adaptor

**Fits any Weldon Shank Cutter**

**MORSE TAPER ARBORS:**

Rotabroach™ manufacture a range of Morse Taper Arbors allowing you to utilise other types of machinery for use with annular cutters, larger diameter tools and shank diameters.

Range of Morse Taper Arbors Available

High Quality Manufacturing

3.4" & 1-1/4" Shank Diameters



Part Number	Morse Taper	Shank Dia	Depth
CA120	2	19.05mm	50mm
CA130	3	19.05mm	50mm
CA130 + Pilot RA3120	3	19.05mm	75mm
CA130 + Pilot RA3122	3	19.05mm	100mm
CA130X	3	32mm	50mm
CA130X + Pilot RA3121	3	32mm	75mm
CA130X + Pilot RA3123	3	32mm	100mm
CA1375 + Pilot SRA130	3	19.05mm	75mm
CA3310 + Pilot 20ZAXL400P	3	32mm	100mm
CA140	4	19.05mm	50mm
CA1475	4	19.05mm	75mm
CA340	4	32mm	50mm
CA3475	4	32mm	75mm
CA1575	5	19.05mm	75mm
CA3510	5	32mm	100mm
CA1510	5	19.05mm	100mm

**CUTTING LUBRICANTS:**

- Rotabroach™ cutting fluid and lubricants have been formulated to ensure you get the most out of your cutters.
- For applications where fluid is unsuitable we have our 'Slick-Stik™' lubrication sticks ensuring you can still use lubrication even when working at height.

Part Number	Volume
RD208	1L Neat Cutting Fluid
RD229	5L Neat Cutting Fluid
RD2094	Cutting Paste 500g
RD40068	Slick-Stik™ 1.68oz
RD40065	Slick-Stik™ 16oz



**EXTENSION ARBORS:**

Designed for extended reach, whilst maintaining concentricity over various lengths.

Range of extensions available

Part Number	Extension
RD2091	25mm
RD2090	50mm
RD2092	75mm
RD2102	100mm
RD2103	150mm
RD2104	200mm
RD2105	250mm



**VACUUM PAD:**

For applications where is it unsuitable to fit the magnet of a drill directly to the material surface.



Part Number	Product Description
DB121	Rotabroach™ Vacuum Pad

**PIPE ADAPTER KIT:**

With the addition of a simple adaptor kit, Rotabroach machines can be used for cutting holes in most pipes.



Part Number	Product Description
RD2311	Rotabroach™ Pipe Adapter Kit

**SWARF STICK:**

This hand held lightweight tool helps attract ferrous metal chippings and swarf which can easily be removed from the work area. Simply push in the handle and place the tool over the metal chippings and swarf. The stick will attract the waste to itself.

Part Number	CT/010/100
-------------	------------


Lightweight and easy to use



Rail: RHINO 4 Magnetic Drill

# RHINO4 RAIL

The RHINO 4 delivers faster drilling capability with a Honda 4 stroke engine.

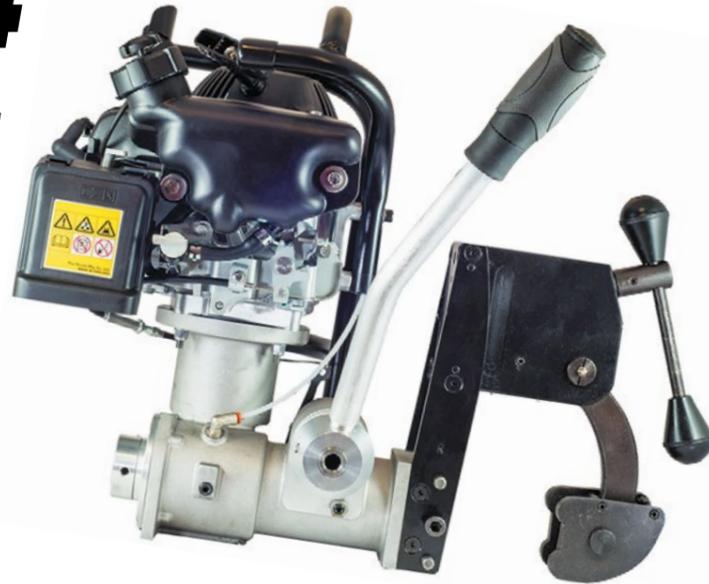

POWERED by  
**HONDA**

## SPECIFICATIONS:

Cutter Capacity	36mm
No Load Speed	320RPM
Motor Specification	1500W 2.0HP
Magnet Adhesion	n/a
Length	540mm
Height	420mm
Width	420mm
Weight	20kg
Motor	4 stroke petrol

## KEY SPECIFICATIONS:



## INCLUDED:

4mm A/F Tee Handled Hexagon Key; Coolant Feed Dispenser; 8mm Hex Key; 3/16" Long Hex Key

## KEY FEATURES:

- Low noise
- Minimal hand-arm vibration
- Superb fuel efficiency
- Honda 4 stroke engine
- Designed for railway engineers
- Delivers fast drilling capacity

# BUILT FOR RAIL.

PART CODE: RD074



Rail: RHINO E Magnetic Drill

# RHINO E RAIL

The Rhino E is an electric machine, designed specifically for tough rail-working environments.



## SPECIFICATIONS:

Cutter Capacity	40mm
Twist Drill Capacity	13.5mm
No Load Speed	270-610RPM
Motor Specification	1100W
Length	640mm
Height	320mm
Width	180mm
Weight	16kg
Motor	110/230V

## KEY SPECIFICATIONS:



## INCLUDED:

4mm A/F Tee Handled Hexagon Key; 3mm Hexagon key; Coolant Feed Dispenser

## KEY FEATURES:

- Ideal for tunnel work and confined spaces with poor ventilation
- Powerful 1100W electric motor
- Thermal overload protection for increased machine durability

# BUILT FOR RAIL.

PART CODE: CM/127/1 (110V), CM/127/3 (230V)



**ELEMENT™ 14 Chop Saw and BLADE RANGE**



**ELEMENT™ 14**  
Chop Saw

**Make light work of cutting steel plate, square tube, angle iron, pipe, tube and sheet metal.**

**SPECIFICATIONS:**

No Load Speed	1300/1450
Motor Specification	110V 1800W 230v 2200W
Cutting Capacity Box Section	120 x 120mm
Cutting Capacity Rectangular Section	95 x 180mm
Cutting Capacity Pipe	130mm
Overall Dimensions	565 x 285 x 405mm
Weight	28kg
Safety Features	Retracting blade guard and metal chip collection chamber.

**KEY SPECIFICATIONS:**

  
**BEVEL**  
**0-45°**

  
**PIPE Cutting Capacity**  
**Ø 130mm**

  
**Square Section**  
**MAX thickness**  
**90mm x 90mm**

  
**Weight**  
**28Kg**

  
**Rectangular**  
**Section Capacity**  
**95mm x 185mm**

  
**1800W**  
**Motor**

**KEY FEATURES:**

- **EFFORTLESS** cutting for steel plate, square tube, angle iron, pipe, tube and sheet metal
- **QUICKER**, more accurate and **SAFER** than conventional abrasive cutting saws
- **SPARK FREE** with no burr
- **SWIVEL VICE** to enable 45° cutting

**INCLUDED:**  
Cermet-tipped Steel Cutting Blade; Hexagonal Key; Quick Release Vice

PART CODE: Element 14/1A (110V), Element 14/3A (230V)

**ELEMENT™ 14 Chop Saw and BLADE RANGE**

**14" CERMET BLADES**

**CERMET blades produce a clean, cool cut, with minimal vibration and sparks. Cermet tipped, offering increased tool life.**



- **Last up to 20 TIMES LONGER** than conventional abrasive discs
- **UP TO 40% better life** than TCT blades
- **TRIPLE CHIP** design for added durability

**14" Cermet Blades • Specifications:**

Part Number	Suitable for (Material)	Teeth	Bore
RABP355FS	Steel	66T	25.4mm (1")
RABP355AL	Aluminium	80T	25.4mm (1")
RABP355MP	Multi-Purpose	36T	25.4mm (1")
RABP355SS	Stainless Steel	120T	25.4mm (1")

# ANNULAR Cutters

Choosing the **RIGHT** cutter for the **RIGHT** job.



ANNULAR CUTTER MATERIAL GUIDE	RAPTOR E™	RAPTOR X™	RAPTOR X+™	RAPTOR T™	RAPTOR CTX™	RAPTOR RAILXR™	RAPTOR RAILTR™
	HSS M2AL designed for faster cutting.	Raptor X the original high performance annular cutter for 3x life.	Specially formulated coated cutter ideal for harder materials.	Tungsten Carbide Tipped Cutters ideal for tough steels.	Cermet Carbide Tipped Cutters for Hardox® style materials.	HSS Rail Geometry Cutters ideal for Rail Track.	Tungsten Carbide Tipped Rail Cutters ideal for hardened Rail Track.
	HSS M2AL	HSS M2AL	HSS M2AL	TCT	CTCT	HSS M2AL	TCT
	<750N	<900N	<900N	<1400N	<1800N	<900N	<1400N
Mild Steel	✓	✓	✓	✓	✓	✗	✗
Structural Steel	✓	✓	✓	✓	✓	✗	✗
Construction Steel	✓	✓	✓	✓	✓	✗	✗
High Strength Steel	✗	✓	✓	✓	✓	✗	✗
Fine Grain Steel	✗	✗	✓	✓	✓	✗	✗
Stainless Steel	✗	✗	✓	✓	✓	✗	✗
Hardox®	✗	✗	✗	✗	✓	✗	✗
Inconel®	✗	✗	✗	✗	✓	✗	✗
Standard Railtrack	✗	✗	✗	✗	✗	✓	✓
Hardened Railtrack	✗	✗	✗	✗	✗	✗	✓

# RAPTOR E™

## HSS M2AL


High Speed Steel Cutters, ideal for fast speed cutting in general fabrication.



# RAPTOR E™

## HSS M2AL

Alternative tooth geometry, for greater heat dissipation

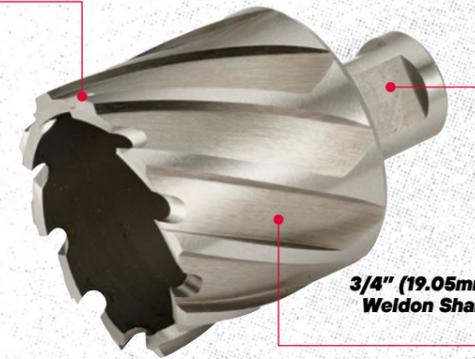

3/4" (19.05mm) Weldon Shank

Thin wall technology for faster cuts

### Suitable for Drilling:



- Thin wall technology for the fastest cutting speed.
- Alternative tooth geometry for heat dissipation in the cutting action.
- New range of major size annular cutters, ideal for site fabrication.
- Using a pilot pin avoids the risks of breakage.

### Raptor E™ Pilot Pin Size Guide:

Pilot Pin Code	Suitable Cutter Sizes
SRA25	RE10S - RE40S
SRA50	RE10L - RE40L

Diameter (mm)	25mm Depth of Cut	50mm Depth of Cut
10mm	RE10S	RE10L
11mm	RE11S	RE11L
12mm	RE12S	RE12L
13mm	RE13S	RE13L
14mm	RE14S	RE14L
15mm	RE15S	RE15L
16mm	RE16S	RE16L
17mm	RE17S	RE17L
18mm	RE18S	RE18L
19mm	RE19S	RE19L
20mm	RE20S	RE20L
21mm	RE21S	RE21L
22mm	RE22S	RE22L
23mm	RE23S	RE23L
24mm	RE24S	RE24L
25mm	RE25S	RE25L
26mm	RE26S	RE26L
27mm	RE27S	RE27L
28mm	RE28S	RE28L
29mm	RE29S	RE29L
30mm	RE30S	RE30L
31mm	RE31S	RE31L
32mm	RE32S	RE32L
33mm	RE33S	RE33L
34mm	RE34S	RE34L
35mm	RE35S	RE35L
36mm	RE36S	RE36L
37mm	RE37S	RE37L
38mm	RE38S	RE38L
39mm	RE39S	RE39L
40mm	RE40S	RE40L



**ANNULAR Cutters**

# RAPTOR X™

## HSS M2AL

**Raptor X™ high performance HSS annular cutter for 3x life.**



**Available as individuals and in kits**

**ANNULAR Cutters**

# RAPTOR X™

## HSS M2AL



**Unique and original design geometry used by Rotabroach™ since 1975**

**Strip landed for enhanced clearance, leading to extended tool life**

**Made from M2AL for drilling harder materials**

**3/4" (19.05mm) Weldon Shank**

**Suitable for Drilling:**



- **3x Longer life than standard HSS Annular cutters.**
- **Unique and original design geometry used by Rotabroach™ since 1975.**
- **Market leading cutting performance for speed and tool life.**
- **Strip landed for enhanced clearance leading to extended tool life.**
- **Made from high grade M2AL for drilling harder materials.**
- **Using a pilot pin avoids the risks of breakage.**

**Raptor X™ Pilot Pin Size Guide:**

Pilot Pin Code	Suitable Cutter Sizes
SRA3057	RAP110 – RAP120
SRA25	RAP130 – RAP650
SRA50	RAPL130 - RAPL650
RA3013	RAPL120

Diameter (mm)	30mm Depth of Cut	50mm Depth of Cut
11mm	RAP110	RAPL110
12mm	RAP120	RAPL120
13mm	RAP130	RAPL130
14mm	RAP140	RAPL140
15mm	RAP150	RAPL150
16mm	RAP160	RAPL160
17mm	RAP170	RAPL170
18mm	RAP180	RAPL180
19mm	RAP190	RAPL190
20mm	RAP200	RAPL200
21mm	RAP210	RAPL210
22mm	RAP220	RAPL220
23mm	RAP230	RAPL230
24mm	RAP240	RAPL240
25mm	RAP250	RAPL250
26mm	RAP260	RAPL260
27mm	RAP270	RAPL270
28mm	RAP280	RAPL280
29mm	RAP290	RAPL290
30mm	RAP300	RAPL300
31mm	RAP310	RAPL310
32mm	RAP320	RAPL320
33mm	RAP330	RAPL330
34mm	RAP340	RAPL340
35mm	RAP350	RAPL350
36mm	RAP360	RAPL360
37mm	RAP370	RAPL370
38mm	RAP380	RAPL380
39mm	RAP390	RAPL390
40mm	RAP400	RAPL400
41mm	RAP410	RAPL410
42mm	RAP420	RAPL420
43mm	RAP430	RAPL430
44mm	RAP440	RAPL440
45mm	RAP450	RAPL450
46mm	RAP460	RAPL460
47mm	RAP470	RAPL470
48mm	RAP480	RAPL480
49mm	RAP490	RAPL490
50mm	RAP500	RAPL500
51mm	RAP510	RAPL510
52mm	RAP520	RAPL520
53mm	RAP530	RAPL530
54mm	RAP540	RAPL540
55mm	RAP550	RAPL550
56mm	RAP560	RAPL560
57mm	RAP570	RAPL570
58mm	RAP580	RAPL580
59mm	RAP590	RAPL590
60mm	RAP600	RAPL600
61mm	RAP610	RAPL610
62mm	RAP620	RAPL620
63mm	RAP630	RAPL630
64mm	RAP640	RAPL640
65mm	RAP650	RAPL650

# RAPTOR X+™

## HSS M2AL

Raptor X+™ with Specially formulated Unique X+ Coating for 70% longer tool life.




Available as individuals and in kits

# RAPTOR X+™ HSS M2AL

3/4" (19.05mm) Weldon Shank

Suitable for long drilling runs under load

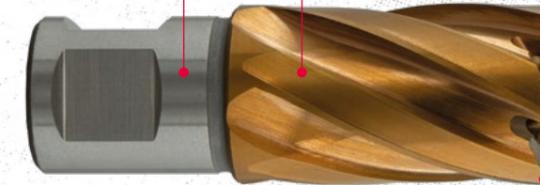

Ideal for drilling harder materials, due to lower heat levels at the cutting edge



Unique X+ Coating exclusive to Rotabroach™ High Performance tooling lines.

### Suitable for Drilling:



- Extend tool life by up to 70% longer compared to other HSS Cutters.
- Reduced heat generation at the cutting edge for optimal performance.
- Unique X+ Coating exclusive to Rotabroach™ High Performance tooling lines.
- Using a pilot pin avoids the risks of breakage.

### Raptor X+™ Pilot Pin Size Guide:

Pilot Pin Code	Suitable Cutter Sizes
SRA3057	RAPXP110 - RAPXP120
SRA25	RAPXP130 - RAPXP650
SRA50	RAPXPL130 - RAPXPL650
RA3013	RAPXPL120

Diameter (mm)	30mm Depth of Cut	50mm Depth of Cut
11mm	RAPXP110	RAPXPL110
12mm	RAPXP120	RAPXPL120
13mm	RAPXP130	RAPXPL130
14mm	RAPXP140	RAPXPL140
15mm	RAPXP150	RAPXPL150
16mm	RAPXP160	RAPXPL160
17mm	RAPXP170	RAPXPL170
18mm	RAPXP180	RAPXPL180
19mm	RAPXP190	RAPXPL190
20mm	RAPXP200	RAPXPL200
21mm	RAPXP210	RAPXPL210
22mm	RAPXP220	RAPXPL220
23mm	RAPXP230	RAPXPL230
24mm	RAPXP240	RAPXPL240
25mm	RAPXP250	RAPXPL250
26mm	RAPXP260	RAPXPL260
27mm	RAPXP270	RAPXPL270
28mm	RAPXP280	RAPXPL280
29mm	RAPXP290	RAPXPL290
30mm	RAPXP300	RAPXPL300
31mm	RAPXP310	RAPXPL310
32mm	RAPXP320	RAPXPL320
33mm	RAPXP330	RAPXPL330
34mm	RAPXP340	RAPXPL340
35mm	RAPXP350	RAPXPL350
36mm	RAPXP360	RAPXPL360
37mm	RAPXP370	RAPXPL370
38mm	RAPXP380	RAPXPL380
39mm	RAPXP390	RAPXPL390
40mm	RAPXP400	RAPXPL400

**ANNULAR Cutters**


# RAPTOR T™

## CARBIDE TCT

**Raptor T™ Carbide Tipped Cutters for the toughest materials.**



**Available as individuals and in kits**

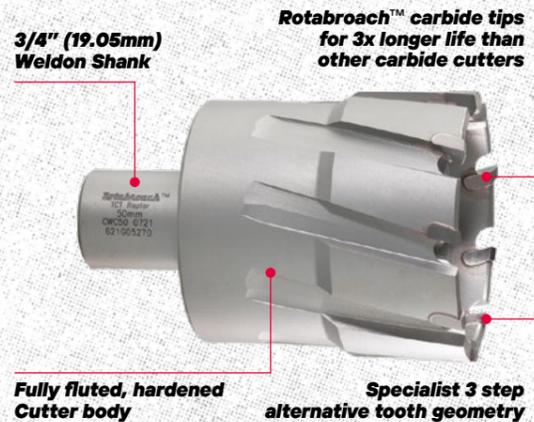

- Specialist 3 step alternative tooth geometry for the smoothest cut.
- Extensive range of diameters and sizes for every application.
- Designed for drilling tougher materials up to 1400N/mm<sup>2</sup>.
- Using a pilot pin avoids the risks of breakage.
- 150mm & 200mm Depth of Cut options supplied with Specialist pins\*.

**Raptor T™ Pilot Pin Size Guide:**

Pilot Pin Code	Suitable Cutter Sizes
SRA90	RAPT120 - RAPT170
RA3089	RAPT180 - RAPT520
SRA50	RAPTL120 - RAPTL170
RA356	RAPTL180 - RAPTL650
RA3094	RAPTL660+
SRA130	RAPTT120 - RAPTT170
RA3120	RAPTT180 - RAPTT650
RA3121	RAPTT660+
20ZAXL400P	RAPTXX120 - RAPTXX170
RA3122	RAPTXX180 - RAPTXX650
RA3123	RAPTXX660+

**ANNULAR Cutters**

# RAPTOR T™ CARBIDE TCT

Dia (mm)	35mm D.O.C	50mm D.O.C	75mm D.O.C	100mm D.O.C	150mm* D.O.C	200mm* D.O.C
12mm	RAPT120	RAPT120				
13mm	RAPT130	RAPT130				
14mm	RAPT140	RAPT140	RAPT140	RAPT140		
15mm	RAPT150	RAPT150	RAPT150	RAPT150		
16mm	RAPT160	RAPT160	RAPT160	RAPT160		
17mm	RAPT170	RAPT170	RAPT170	RAPT170		
18mm	RAPT180	RAPT180	RAPT180	RAPT180	RAPTXX180	
19mm	RAPT190	RAPT190	RAPT190	RAPT190	RAPTXX190	
20mm	RAPT200	RAPT200	RAPT200	RAPT200	RAPTXX200	
21mm	RAPT210	RAPT210	RAPT210	RAPT210	RAPTXX210	
22mm	RAPT220	RAPT220	RAPT220	RAPT220	RAPTXX220	RAPTXX220
23mm	RAPT230	RAPT230	RAPT230	RAPT230	RAPTXX230	RAPTXX230
24mm	RAPT240	RAPT240	RAPT240	RAPT240	RAPTXX240	RAPTXX240
25mm	RAPT250	RAPT250	RAPT250	RAPT250	RAPTXX250	RAPTXX250
26mm	RAPT260	RAPT260	RAPT260	RAPT260	RAPTXX260	RAPTXX260
27mm	RAPT270	RAPT270	RAPT270	RAPT270	RAPTXX270	RAPTXX270
28mm	RAPT280	RAPT280	RAPT280	RAPT280	RAPTXX280	RAPTXX280
29mm	RAPT290	RAPT290	RAPT290	RAPT290	RAPTXX290	RAPTXX290
30mm	RAPT300	RAPT300	RAPT300	RAPT300	RAPTXX300	RAPTXX300
31mm	RAPT310	RAPT310	RAPT310	RAPT310	RAPTXX310	RAPTXX310
32mm	RAPT320	RAPT320	RAPT320	RAPT320	RAPTXX320	RAPTXX320
33mm	RAPT330	RAPT330	RAPT330	RAPT330	RAPTXX330	RAPTXX330
34mm	RAPT340	RAPT340	RAPT340	RAPT340	RAPTXX340	RAPTXX340
35mm	RAPT350	RAPT350	RAPT350	RAPT350	RAPTXX350	RAPTXX350
36mm	RAPT360	RAPT360	RAPT360	RAPT360	RAPTXX360	RAPTXX360
37mm	RAPT370	RAPT370	RAPT370	RAPT370	RAPTXX370	RAPTXX370
38mm	RAPT380	RAPT380	RAPT380	RAPT380	RAPTXX380	RAPTXX380
39mm	RAPT390	RAPT390	RAPT390	RAPT390	RAPTXX390	RAPTXX390
40mm	RAPT400	RAPT400	RAPT400	RAPT400	RAPTXX400	RAPTXX400
41mm	RAPT410	RAPT410	RAPT410	RAPT410	RAPTXX410	RAPTXX410
42mm	RAPT420	RAPT420	RAPT420	RAPT420	RAPTXX420	RAPTXX420
43mm	RAPT430	RAPT430	RAPT430	RAPT430	RAPTXX430	RAPTXX430
44mm	RAPT440	RAPT440	RAPT440	RAPT440	RAPTXX440	RAPTXX440
45mm	RAPT450	RAPT450	RAPT450	RAPT450	RAPTXX450	RAPTXX450
46mm	RAPT460	RAPT460	RAPT460	RAPT460	RAPTXX460	RAPTXX460
47mm	RAPT470	RAPT470	RAPT470	RAPT470	RAPTXX470	RAPTXX470
48mm	RAPT480	RAPT480	RAPT480	RAPT480	RAPTXX480	RAPTXX480
49mm	RAPT490	RAPT490	RAPT490	RAPT490	RAPTXX490	RAPTXX490
50mm	RAPT500	RAPT500	RAPT500	RAPT500	RAPTXX500	RAPTXX500
51mm	RAPT510	RAPT510	RAPT510	RAPT510	RAPTXX510	
52mm	RAPT520	RAPT520	RAPT520	RAPT520	RAPTXX520	

Dia (mm)	35mm D.O.C	50mm D.O.C	75mm D.O.C	100mm D.O.C	150mm* D.O.C	200mm* D.O.C
53mm		RAPTL530	RAPTT530	RAPTXX530	RAPTXX530	
54mm		RAPTL540	RAPTT540	RAPTXX540	RAPTXX540	
55mm		RAPTL550	RAPTT550	RAPTXX550	RAPTXX550	
56mm		RAPTL560	RAPTT560	RAPTXX560	RAPTXX560	
57mm		RAPTL570	RAPTT570	RAPTXX570	RAPTXX570	
58mm		RAPTL580	RAPTT580	RAPTXX580	RAPTXX580	
59mm		RAPTL590	RAPTT590	RAPTXX590	RAPTXX590	
60mm		RAPTL600	RAPTT600	RAPTXX600	RAPTXX600	
61mm		RAPTL610		RAPTXX610	RAPTXX610	
62mm		RAPTL620		RAPTXX620	RAPTXX620	
63mm		RAPTL630		RAPTXX630	RAPTXX630	
64mm		RAPTL640		RAPTXX640	RAPTXX640	
65mm		RAPTL650		RAPTXX650	RAPTXX650	
66mm		RAPTL660		RAPTXX660	RAPTXX660	
67mm		RAPTL670		RAPTXX670	RAPTXX670	
68mm		RAPTL680		RAPTXX680	RAPTXX680	
69mm		RAPTL690		RAPTXX690	RAPTXX690	
70mm		RAPTL700		RAPTXX700	RAPTXX700	
71mm		RAPTL710		RAPTXX710	RAPTXX710	
72mm		RAPTL720		RAPTXX720	RAPTXX720	
73mm		RAPTL730		RAPTXX730	RAPTXX730	
74mm		RAPTL740		RAPTXX740	RAPTXX740	
75mm		RAPTL750		RAPTXX750	RAPTXX750	
76mm		RAPTL760		RAPTXX760	RAPTXX760	
77mm		RAPTL770		RAPTXX770	RAPTXX770	
78mm		RAPTL780		RAPTXX780	RAPTXX780	
79mm		RAPTL790		RAPTXX790	RAPTXX790	
80mm		RAPTL800		RAPTXX800	RAPTXX800	
81mm		RAPTL810		RAPTXX810	RAPTXX810	
82mm		RAPTL820		RAPTXX820	RAPTXX820	
83mm		RAPTL830		RAPTXX830	RAPTXX830	
84mm		RAPTL840		RAPTXX840	RAPTXX840	
85mm		RAPTL850		RAPTXX850	RAPTXX850	
86mm		RAPTL860		RAPTXX860	RAPTXX860	
87mm		RAPTL870		RAPTXX870	RAPTXX870	
88mm		RAPTL880		RAPTXX880	RAPTXX880	
89mm		RAPTL890		RAPTXX890	RAPTXX890	
90mm		RAPTL900		RAPTXX900	RAPTXX900	
91mm		RAPTL910		RAPTXX910	RAPTXX910	
92mm		RAPTL920		RAPTXX920	RAPTXX920	
93mm		RAPTL930		RAPTXX930	RAPTXX930	
94mm		RAPTL940		RAPTXX940	RAPTXX940	
95mm		RAPTL950		RAPTXX950	RAPTXX950	
96mm		RAPTL960		RAPTXX960	RAPTXX960	
97mm		RAPTL970		RAPTXX970	RAPTXX970	
98mm		RAPTL980		RAPTXX980	RAPTXX980	
99mm		RAPTL990		RAPTXX990	RAPTXX990	
100mm		RAPTL1000		RAPTXX1000	RAPTXX1000	

66mm+ diameter cutters have a larger shank diameter 1-1/4" or 32mm, and require 3MT arbor CA130X.  
\*150mm & 200mm D.O.C Made to Order

\*150mm & 200mm D.O.C Made to Order

# RAPTOR CTX™

## CERMET CARBIDE

Raptor CTX™ Cermet Carbide Tipped Cutters for Hardox® & Inconel® applications.


SSAB



Available as individuals and in kits

# RAPTOR CTX™

## CERMET CARBIDE

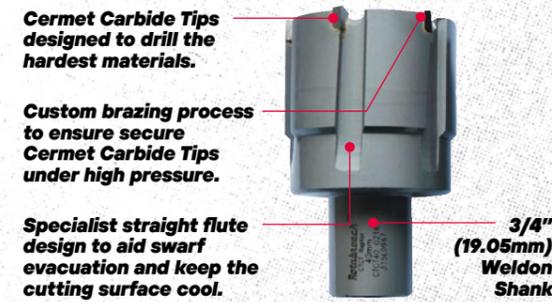

Suitable for Drilling:



Diameter (mm)	25mm D.O.C	Diameter (mm)	25mm D.O.C
18mm	RAPCTX180	30mm	RAPCTX300
19mm	RAPCTX190	31mm	RAPCTX310
20mm	RAPCTX200	32mm	RAPCTX320
21mm	RAPCTX210	33mm	RAPCTX330
22mm	RAPCTX220	34mm	RAPCTX340
23mm	RAPCTX230	35mm	RAPCTX350
24mm	RAPCTX240	36mm	RAPCTX360
25mm	RAPCTX250	37mm	RAPCTX370
26mm	RAPCTX260	38mm	RAPCTX380
27mm	RAPCTX270	39mm	RAPCTX390
28mm	RAPCTX280	40mm	RAPCTX400
29mm	RAPCTX290		

- Raptor CTX™ specialist cermet carbide tips cutting 6x more holes than Raptor T™ Carbide cutters.
- Specialist flute geometry for cutting the hardest materials under significant heat.
- Ideal for use in plant, defence heavy haulage refurbishment and upgrades.
- SSAB tested and approved for drilling Hardox 500.
- Using a pilot pin avoids the risks of breakage.

Raptor CTX™ Pilot Pin Size Guide:

Pilot Pin Code	Suitable Cutter Sizes
SRA25	RAPCTX180 - RAPCTX400



**ANNULAR Cutters**

# RAPTOR RAIL™ XR



**Suitable for Drilling:**



**STANDARD RAIL TRACK**

- HSS Rail cutters ideal for use on Standard Rail Track applications.
- Raptor Rail™ geometry for use in Battery, Corded & Petrol Rail Drills.
- Custom flute design to aid swarf evacuation and rail drilling speeds.
- Available with alternative shank variants for use in Cembre™ / Trak-Star™ machines.

**Raptor Rail XR™ Pilot Pin Size Guide:**

Pilot Pin Code	Suitable Cutter Sizes
SRA25	RAPXR130 - RAPXR360
SRA50	RAPXRL130 - RAPXRL360

Diameter (mm)	25mm D.O.C	50mm D.O.C
13mm	RAPXR130	RAPXRL130
14mm	RAPXR140	RAPXRL140
15mm	RAPXR150	RAPXRL150
16mm	RAPXR160	RAPXRL160
17mm	RAPXR170	RAPXRL170
18mm	RAPXR180	RAPXRL180
19mm	RAPXR190	RAPXRL190
20mm	RAPXR200	RAPXRL200
21mm	RAPXR210	RAPXRL210
22mm	RAPXR220	RAPXRL220
23mm	RAPXR230	RAPXRL230
24mm	RAPXR240	RAPXRL240
25mm	RAPXR250	RAPXRL250
26mm	RAPXR260	RAPXRL260
27mm	RAPXR270	RAPXRL270
28mm	RAPXR280	RAPXRL280
29mm	RAPXR290	RAPXRL290
30mm	RAPXR300	RAPXRL300
31mm	RAPXR310	RAPXRL310
32mm	RAPXR320	RAPXRL320
33mm	RAPXR330	RAPXRL330
34mm	RAPXR340	RAPXRL340
35mm	RAPXR350	RAPXRL350
36mm	RAPXR360	RAPXRL360

**ANNULAR Cutters**

# RAPTOR RAIL™ TR



**Suitable for Drilling:**



**STANDARD RAIL TRACK**



**HARDENED RAIL TRACK**

- TCT Rail Cutters designed for hardened rail.
- Designed to cut 3x longer than HSS Rail Cutters, material dependant.
- Custom flute design to aid swarf evacuation and rail drilling speeds.
- Available with alternative shank variants for use in Cembre™ / Trak-Star™ machines.

**Raptor Rail TR™ Pilot Pin Size Guide:**

Pilot Pin Code	Suitable Cutter Sizes
SRA25	RAPTR180 - RAPTR360
SRA50	RAPTRL180 - RAPTRL360*

\*Available upon request

Diameter (mm)	25mm D.O.C	50mm D.O.C
18mm	RAPTR180	RAPTRL180
19mm	RAPTR190	RAPTRL190
20mm	RAPTR200	RAPTRL200
21mm	RAPTR210	RAPTRL210
22mm	RAPTR220	RAPTRL220
23mm	RAPTR230	RAPTRL230
24mm	RAPTR240	RAPTRL240
25mm	RAPTR250	RAPTRL250
26mm	RAPTR260	RAPTRL260
27mm	RAPTR270	RAPTRL270
28mm	RAPTR280	RAPTRL280
29mm	RAPTR290	RAPTRL290
30mm	RAPTR300	RAPTRL300
31mm	RAPTR310	RAPTRL310
32mm	RAPTR320	RAPTRL320
33mm	RAPTR330	RAPTRL330
34mm	RAPTR340	RAPTRL340
35mm	RAPTR350	RAPTRL350
36mm	RAPTR360	RAPTRL360

# ANNULAR CUTTER KITS



**Market-Leading Solutions,  
Convenient Kits.**

- **Material types: M2AL & TCT**
- **Kit depths: 30-35mm**
- **Kit sizes: 3, 6, 12 & 24 piece**



### Raptor X™, HSS M2AL Kits:

Product Code	Size Range mm	Description	D.O.C	Kit Type
RAPX1418KIT	14, 16, 18mm	3 Piece Annular Cutter Kit	30mm	Singles
RAPX1222KIT	12, 14, 16, 18, 20, 22mm	6 Piece Annular Cutter Kit	30mm	Singles
RAPX1422KIT	14, 18, 22mm x2	6 Piece Annular Cutter Kit	30mm	Doubles
RAPX1234KIT	12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34mm	12 Piece Annular Cutter Kit	30mm	Singles
RAPX1222KIT2	12, 14, 16, 18, 20, 22mm x2	12 Piece Annular Cutter Kit	30mm	Doubles
RAPX1235KIT	12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35mm	24 Piece Annular Cutter Kit	30mm	Singles
RAPX1232KIT	12, 13, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32mm x2	24 Piece Annular Cutter Kit	30mm	Doubles

### Raptor E™, HSS M2AL Kits:

Product Code	Size Range mm	Description	D.O.C	Kit Type
RE1418KIT	14, 16, 18mm	3 Piece Annular Cutter Kit	25mm	Singles

### Raptor T™, Carbide TCT Kits:

Product Code	Size Range mm	Description	D.O.C	Kit Type
RAPT1830KIT	18, 22, 24, 26, 28, 30mm	6 Piece Annular Cutter Kit	35mm	Singles

### Raptor X+™, HSS M2AL Kits:

Product Code	Size Range mm	Description	D.O.C	Kit Type
RAPXP1222KIT1	12, 14, 16, 18, 20, 22mm	6 Piece Annular Cutter Kit	30mm	Singles
RAPXP1422KIT	14, 18, 22mm x2	6 Piece Annular Cutter Kit	30mm	Doubles

**Pilot pins included in each kit.**

SITEH3RO™

# SITEH3RO™

**Turn your Impact Wrench into a multipurpose metal working machine.**



Pat. WO2024/100390



SITEH3RO™




## Connect Click **GO**

**Drill new, expand, thread and align holes for the major diameters**

**SMOOTH, EASY CUT**

**75%**  
Unique X+ Coating for up to 75% longer tool life.

Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)



**Make NEW HOLES with Step Drills & Step Reamers**



**ALIGN HOLES with Car Reamers**



**THREAD HOLES with Taps**



**EXPAND HOLES with Step Drills and Step & Car Reamers**



SITEH3RO™: Holder

**SITEH3RO™**

**SITEH3RO™  
HOLDER**



## NO LIMITS. JUST POWER.


Designed for the worksite, **SITEH3RO™** is a powerful, safe and convenient metalworking platform that connects directly to an impact wrench using the Connect, Click, Go system. A single wrench can switch quickly between tools for aligning, expanding, drilling and tapping tough metals.

The innovative holder and X+ coating reduce heat and wear, delivering up to **75% longer tool life** than standard tools. Extensively tested in extreme conditions, **SITEH3RO™** brings Rotabroach™ performance to new sectors, enabling safe work at height and in confined spaces across construction, fabrication and maintenance.

SITEH3RO™: Holder

**SITEH3RO™**

**SITEH3RO™  
HOLDER**

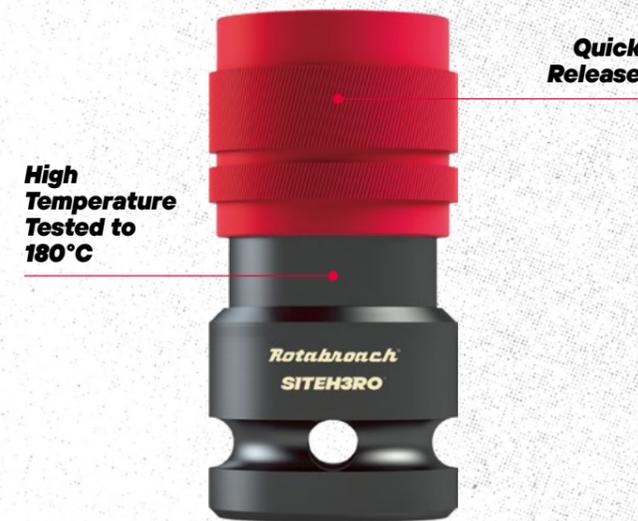

**Suitable  
for 1/2" and  
3/4" Impact  
Wrenches**



Pat. WO2024/100390

### SITEH3RO™ Holder Sizes:


Part Number	Description	Size	Impact Wrench
RSH12	1/2" Square Holder	1/2"	1/2" Impact Wrench
RSH34	3/4" Square Holder	3/4"	3/4" Impact Wrench

### SITEH3RO™ Holder Spare Parts:


Part Number	Description
RD43209	SITEH3RO™ O-Ring for 1/2" Square Holder
RD43211	SITEH3RO™ O-Ring for 3/4" Square Holder
RD43210	SITEH3RO™ Retaining Pin for 3/4" Square Holder
RD43208	SITEH3RO™ Retaining Pin for 1/2" Square Holder

**Turn your Impact Wrench into a multipurpose metal working machine.**


**1. Connect**  
Connect the holder to the Impact Wrench




**2. Click**  
Insert the tool

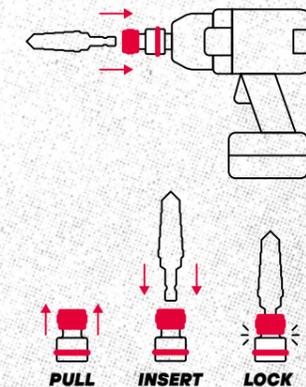

**3. GO**  
Start DRILLING

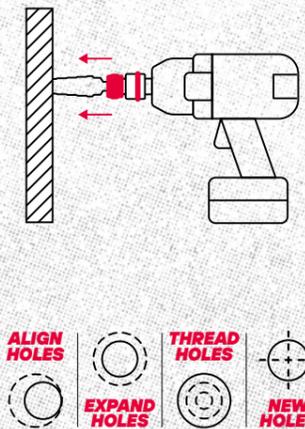

## STEP DRILL

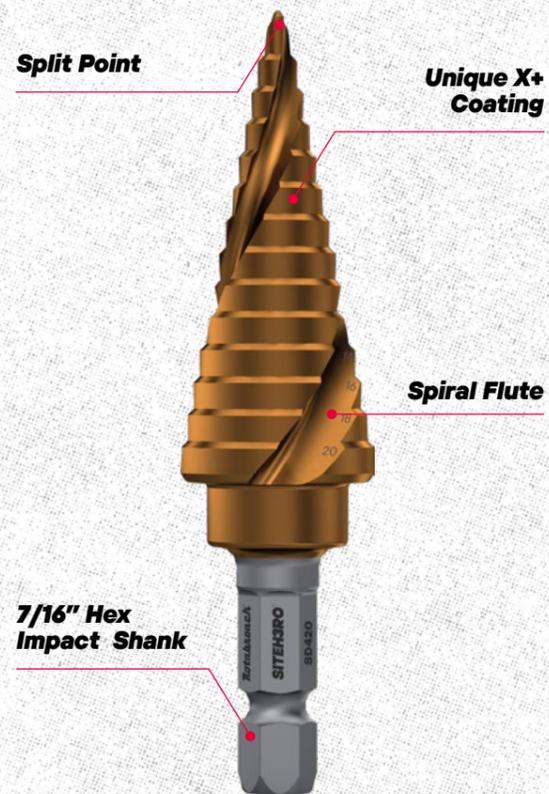

- Drill new holes and expand thin gauge material with an Impact Wrench and SITEH3RO™.
- Utilise in SITEH3RO™ holders for Impact Wrenches or any standard drill chuck.
- Holes from 4mm to 30mm in diameter, each step 5mm.
- Unique X+ Coating for up to 75% longer tool life.
- Suitable for use in standard 3-jaw drill chucks.

### STEP DRILL Sizes:

Part Number	Diameter	Shank
SD412	4mm to 12mm	7/16" Hex Impact Shank
SD420	4mm to 20mm	
SD430	4mm to 30mm	
SD418*	4mm to 18mm	


\* Specially designed variant for crash barriers and guard rails.

### STEP DRILL Kit:


Part Number	Diameter	Shank
SHRSD1	4mm to 12mm 4mm to 20mm 4mm to 30mm	7/16" Hex Impact Shank

**75%**  
Unique X+ Coating for up to 75% longer tool life.

Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)



**NEW HOLES**



**EXPAND HOLES**



## BOLT EXTRACTOR



- Removes broken screws and bolts without damaging the original thread.
- Specialist reverse spiral design and tapered body grips damaged bolts/screws securely.
- Allows counter-clockwise removal of bolts or screws using your impact wrench and SITEH3RO™.


### BOLT EXTRACTOR Sizes:

Part Number	Diameter	Shank
SEM5M6	To Extract Bolt Size M5 to M6	7/16" Hex Impact Shank
SEM8M10	To Extract Bolt Size M8 to M10	
SEM12M14	To Extract Bolt Size M12 to M14	7/16" Hex Impact Shank
SEM16M20	To Extract Bolt Size M16 to M20	
SEM22M26	To Extract Bolt Size M22 to M26	


### BOLT EXTRACTOR Kit:

Part Number	Diameter	Kit
SHRSE1	To Extract Bolt Size M5 to M26	5 Piece Kit


Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)



**EXTRACT BOLTS**



**NEW HOLES**



SITEH3RO™: Standard Twist Drill

**SITEH3RO™**

**NEW TOOL  
FOR 2026**

# STANDARD TWIST DRILL



- Drill new holes to metric diameters using an impact wrench and SITEH3RO™.
- Used in SITEH3RO™ holders for impact wrenches.
- Split point – self-centring design reduces “walking” or wandering during use; no centre punch required.
- High-performance coating provides up to 75% longer tool life.
- Suitable for use in standard 3-jaw drill chucks.

### STANDARD TWIST DRILL Sizes:

Part Number	Diameter	Shank
TD5	5mm x 55mm	7/16" Hex Impact Shank
TD6	6mm x 55mm	
TD8	8mm x 55mm	
TD10	10mm x 55mm	
TD12	12mm x 55mm	
TD14	14mm x 55mm	
TD16	16mm x 55mm	

### STANDARD TWIST DRILL Kit:

Part Number	Diameter	Kit
SHRTD1	5mm, 6mm, 8mm, 10mm, 12mm, 14mm, 16mm	7 Piece Kit

SITEH3RO™: Standard Twist Drill Core

**SITEH3RO™**

**NEW TOOL  
FOR 2026**

# STANDARD TWIST DRILL CORE



- Drill core diameters to suit metric threads using an impact wrench and SITEH3RO™.
- 5 tools allow you to drill new holes to nominal diameters from M5 to M12.
- Rapid point geometry delivers up to 2.5x faster hole engagement than a standard point.
- Suitable for use in standard 3-jaw drill chucks.

### STANDARD TWIST DRILL CORE Sizes:

Part Number	Diameter	Shank
TDM5	4.2mm x 55mm	7/16" Hex Impact Shank
TDM6	5.0mm x 55mm	
TDM8	6.8mm x 55mm	
TDM10	8.5mm x 55mm	
TDM12	10.2mm x 55mm	

**RAPID POINT GEOMETRY** with a 2.5x faster than a standard point.


### STANDARD TWIST DRILL CORE Kit:

Part Number	Diameter	Kit
SHRTD2	4.2mm, 5mm, 6.8mm, 8.5mm, 10.2mm	5 Piece Kit


**75%**

Unique X+ Coating for up to 75% longer tool life.

Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)




**NEW HOLES**



**75%**

Unique X+ Coating for up to 75% longer tool life.

Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)



**NEW HOLES**



## CAR REAMER



- Align, clean out and expand holes on site with your Impact Wrench and SITEH3RO™.
- Unique X+ Coating for up to 75% longer tool life.
- Available in 18 major diameter sizes.
- Suitable for use in standard 3-jaw drill chucks.

### CAR REAMER Sizes:


Part Number	Diameter	Shank
CR08	8mm	7/16" Hex Impact Shank
CR10	10mm	
CR11	11mm	
CR12	12mm	
CR13	13mm	
CR14	14mm	
CR15	15mm	
CR16	16mm	
CR17	17mm	
CR18	18mm	
CR19	19mm	
CR20	20mm	
CR21	21mm	
CR22	22mm	
CR23	23mm	
CR24	24mm	
CR25	25mm	
CR26	26mm	

### CAR REAMER Kits:


Part Number	Size Range	Kit Description
SHRCR1	14, 18, 22mm	3 Piece Kit
SHRCR2	12, 14, 18, 22 & 26mm	5 Piece Kit
SHRCR3	8, 10, 12, 14, 16, 18, 20, 22, 24, 26mm	10 Piece Kit

**75%**  
Unique X+ Coating for up to 75% longer tool life.


Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)




**ALIGN HOLES**



**EXPAND HOLES**



## STEP REAMER

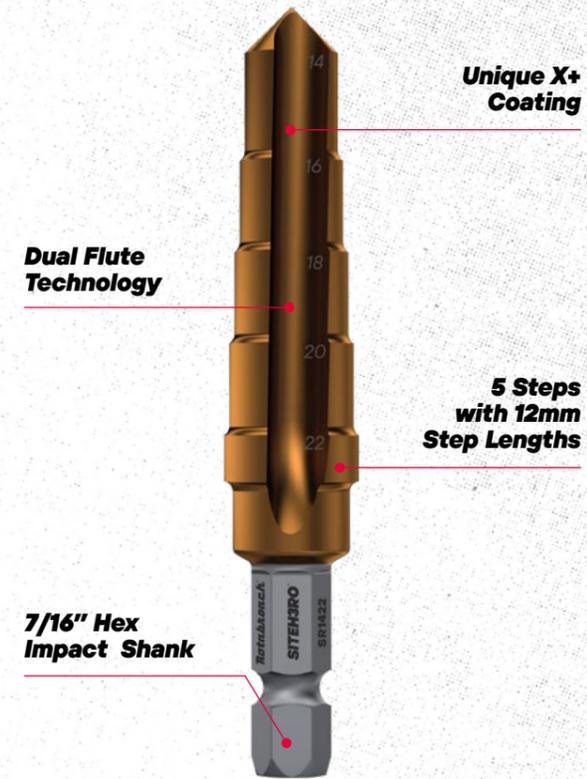

- Expand and clean out holes with your Impact Wrench.
- 3 tools allow you to expand and clean out holes across 15 sizes from 8mm to 28mm in up to 12mm thick material.
- Ideal for expanding holes and available in all major bolt sizes.
- Unique X+ Coating for up to 75% longer tool life.
- Suitable for use in standard 3-jaw drill chucks.

### STEP REAMER Sizes:

Part Number	Diameter	Shank
SR816	8mm to 16mm	7/16" Hex Impact Shank
SR1422	14mm to 22mm	
SR2028	20mm to 28mm	


All STEP REAMERS include 5 steps with 12mm Step Lengths.

### STEP REAMER Kit:


Part Number	Diameter	Shank
SHRSR1	8mm to 16mm 14mm to 22mm 20mm to 28mm	7/16" Hex Impact Shank

**75%**  
Unique X+ Coating for up to 75% longer tool life.

Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)



**NEW HOLES**



**EXPAND HOLES**



## TAP



- **Spiral Point Machine Tap: One Tap Solution.**
- **Thread holes with your Impact Wrench – up to 20x faster than hand tapping.**
- **Unique X+ Coating for up to 75% longer tool life.**
- **Thread holes from M5 to M30.**
- **Tap holes in material up to 25mm deep.**
- **Available in 12 sizes.**


### TAP Sizes:

Part Number	Diameter	Shank
TPM5	M5 x 0.80	7/16" Hex Impact Shank
TPM6	M6 x 1.00	
TPM8	M8 x 1.25	
TPM10	M10 x 1.50	
TPM12	M12 x 1.75	
TPM14	M14 x 2.00	
TPM16	M16 x 2.00	
TPM18	M18 x 2.50	
TPM20	M20 x 2.50	
TPM24	M24 x 3.00	
TPM27	M27 x 3.00	
TPM30	M30 x 3.50	

### TAP Kits:

Part Number	Diameter	Kit
SHRTP1	M6, M8, M10, M12, M16	5 Piece Kit
SHRTP2	M12, M16, M20, M24	4 Piece Kit
SHRTP3	M5, M6, M8, M10, M12, M16, M20, M24, M30	9 Piece Kit

## STANDARD TWIST DRILL TAP

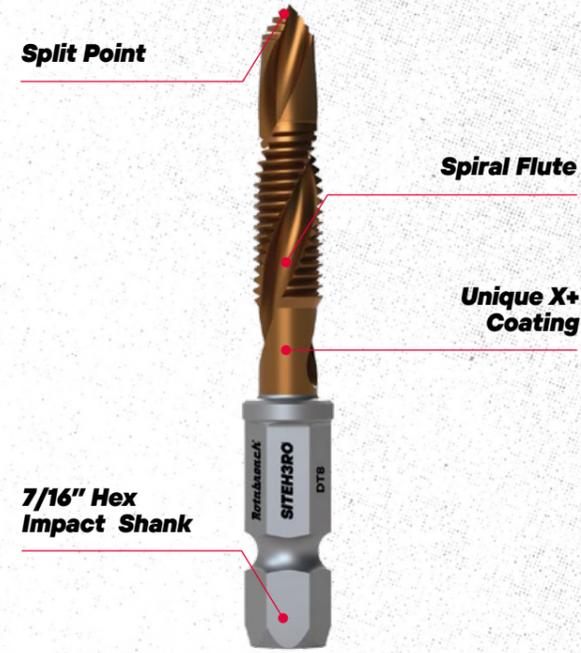

- **Drill core diameters to suit metric threads using an impact wrench and SITEH3RO™.**
- **Five tools allow you to thread and clean out holes from M5 to M12.**
- **Combination drill tap creates the pilot hole and the required thread size in a single operation.**
- **Rapid point geometry delivers up to 2.5x faster hole engagement than a standard point.**
- **Suitable for use in standard 3-jaw drill chucks.**

### STANDARD TWIST DRILL TAP Sizes:

Part Number	Diameter	Shank
DT5	M5x0.80	7/16" Hex Impact Shank
DT6	M6x1.00	
DT8	M8x1.25	
DT10	M10x1.50	
DT12	M12x1.75	

**RAPID POINT GEOMETRY with a 2 1/2 X faster than a standard point.**


### STANDARD TWIST DRILL TAP Kit:

Part Number	Diameter	Kit
SHRDT1	M5x0.80, M6x1.00, M8x1.25, M10x1.5, M12x1.75	5 Piece Kit


**75%**

Unique X+ Coating for up to 75% longer tool life.

Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)




**THREAD HOLES**



**75%**

Unique X+ Coating for up to 75% longer tool life.

Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)



**NEW HOLES**



## KITS



### SITEH3RO™ Ultimate Kit:



Part Number	Tool Type	Diameter	Qty
SHR1	Step Drills	4-12mm / 4-20mm / 4-30mm	3
	Step Reamers	8-16mm / 14-22mm / 20-28mm	3
	Taps	M6, M8, M10 & M12	4
	Car Reamers	14mm / 18mm & 22mm	3
	Twist Drills	6mm, 8mm, 10mm, 12mm, 14mm	5
	Holders	1/2" & 3/4"	2

- Align, Thread, Expand and Drill New Holes
- SITEH3RO™ kit solutions for all major applications
- Multiple kit sizes available per tool type

# 75%

Unique X+ Coating for up to 75% longer tool life.

Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)



NEW HOLES



EXPAND HOLES



THREAD HOLES



ALIGN HOLES

### STEP DRILL Kit:

Part Number	Diameter	Shank
SHRSD1	4mm to 12mm 4mm to 20mm 4mm to 30mm	7/16" Hex Impact Shank

### SCREW EXTRACTOR Kit:

Part Number	Diameter	Kit
SHRSE1	To Extract Bolt Size M5 to M26	5 Piece Kit

### STANDARD TWIST DRILL Kit:

Part Number	Diameter	Kit
SHRTD1	5mm, 6mm, 8mm, 10mm, 12mm, 14mm, 16mm	7 Piece Kit

### STANDARD TWIST DRILL CORE Kit:

Part Number	Diameter	Kit
SHRTD2	4.2mm, 5mm, 6.8mm, 8.5mm, 10.2mm	5 Piece Kit

### CAR REAMER Kits:

Part Number	Size Range	Kit Description
SHRCR1	14, 18, 22mm	3 Piece Kit
SHRCR2	12, 14, 18, 22 & 26mm	5 Piece Kit
SHRCR3	8, 10, 12, 14, 16, 18, 20, 22, 24, 26mm	10 Piece Kit

### STEP REAMER Kit:

Part Number	Diameter	Shank
SHRSR1	8mm to 16mm 14mm to 22mm 20mm to 28mm	7/16" Hex Impact Shank

### TAP Kits:

Part Number	Diameter	Kit
SHRTP1	M6, M8, M10, M12, M16	5 Piece Kit
SHRTP2	M12, M16, M20, M24	4 Piece Kit
SHRTP3	M5, M6, M8, M10, M12, M16, M20, M24, M30	9 Piece Kit



### STANDARD TWIST DRILL TAP Kit:

Part Number	Diameter	Kit
SHRDT1	M5x0.80, M6x1.00, M8x1.25, M10x1.5, M12x1.75	5 Piece Kit

# 75%

Unique X+ Coating for up to 75% longer tool life.

Suitable for 1/2" and 3/4" Impact Wrenches (holder dependent)



NEW HOLES



EXPAND HOLES



THREAD HOLES



ALIGN HOLES

# POWER Tool Accessories -

Choosing the RIGHT tool for the RIGHT job.

## POWER TOOL Accessory Selection Chart

The ROTABROACH™ range of POWER TOOL Accessories has expanded to help provide you with the power to cut metal in even more applications. Use this guide to identify what the correct tool for your application is for the material type, thickness, and power tool you are using, whatever the application.

 Align 
  New 
  Expand 
  Thread 
  Countersink

Product	Max Dia.	Application					Material Thickness						Material Type			Shank		
		Align	New	Expand	Thread	C'SINK	2mm	5mm	12mm	15mm	25mm	50mm	Plastics	Steel <900N	Stainless Steel	3 Flats	1/4" Impact Shank	Round Shank

### CONE DRILLS: CONECUT™

CONECUT™	40mm	✓	✓	✓	✗	✗	✓	✗	✗	✗	✗	✗	✓	✓	✗	✓	✓	✗
----------	------	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

### STEP DRILLS: MULTICUT™

MULTICUT X™	36mm	✓	✓	✓	✗	✗	✓	✓	✗	✗	✗	✗	✓	✓	✗	✓	✓	✗
MULTICUT X SPIRAL™	36mm	✓	✓	✓	✗	✗	✓	✓	✗	✗	✗	✗	✓	✓	✗	✓	✓	✗
MULTICUT X+™	30mm	✓	✓	✓	✗	✗	✓	✓	✗	✗	✗	✗	✓	✓	✓	✗	✓	✗

### MINI CUTTERS: STORM

STORM CUTTERS	25mm	✗	✓	✗	✗	✗	✓	✓	✓*	✗	✗	✗	✓	✓	✗	✓	✗	✗
---------------	------	---	---	---	---	---	---	---	----	---	---	---	---	---	---	---	---	---

### HOLESAWS

TCT HOLESAWS	100mm	✗	✓	✗	✗	✗	✓	✓	✓*	✓*	✓*	✓	✓	✓	✓	✓	✗	✗
--------------	-------	---	---	---	---	---	---	---	----	----	----	---	---	---	---	---	---	---

### HSS FABRICATION TOOLING

COUNTERSINKS	31mm	✗	✗	✗	✗	✓	✓	✓	✓	✓	✓	✗	✓	✓	✗	✗	✗	✓
THREADING	M24	✗	✗	✗	✓	✗	✓	✓	✓	✓	✗	✗	✓	✓	✗	✓	✗	✗
HEXI-BIT	30mm	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗	✗	✓	✓	✗	✗	✓	✗

\* Where indicated please refer to the individual product page for further detail on the depth of cut.

# CONE DRILLS

- Ideal for HVAC, Electrical and Plumbing Installations.
- Designed for material up to 2mm thick, for the best finish.
- Maximum flexibility on hole expansion in thin materials.
- Non slip points for easier starts.
- Available with 3 flat shanks or 1/4" impact ready shanks.
- Available as Singles or Sets.



Available as individuals and in kits


# CONECUT™



Dual Flute Technology

M2 HSS High Speed Steel

3 Flat & 1/4" Impact Shanks available

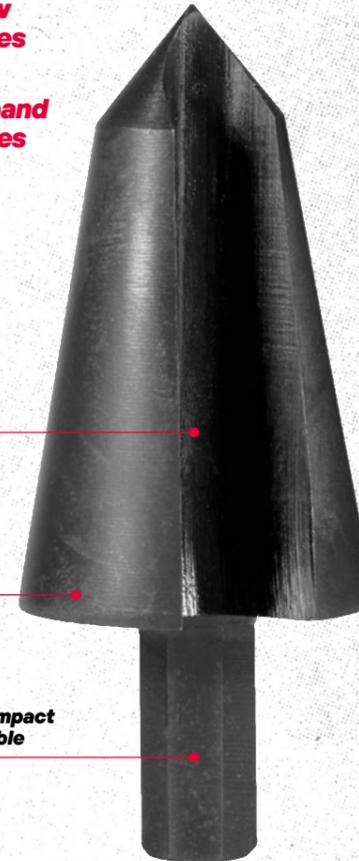

## Suitable for Drilling:



- Made from High Grade M2 High Speed Steel.
- Non-Slip Point for easier starts and better concentricity.
- Treated with Bluemax surface treatment to maximise tool life.

## Traditional 3 Flat Shank:

Product Code	Size Range	Shank Size	M.M.T*
CC314	3-14mm	6mm	2mm
CC620	6-20mm	10mm	2mm
CC1625	16-25mm	10mm	2mm
CC2025	20-25mm	10mm	2mm
CC830	8-30mm	10mm	2mm
CC1630	16-30.5mm	10mm	2mm
CC2540	25-40mm	10mm	2mm

\*Max Material Thickness

## 1/4" Impact Shank: Ideal for use in Impact Drivers

Product Code	Size Range	M.M.T*
CC314IMP	3-14mm	2mm
CC620IMP	6-20mm	2mm
CC1630IMP	16-30.5mm	2mm

\*Max Material Thickness

## CONECUT™ Kits:

Product Code	Size Range mm	Description	Shank Type
CCKIT1	3-14, 6-20, 16-30.5mm	3 Piece Conecut™ X	3 Flat Shank
CCKIT2	3-14, 6-20, 16-30.5mm	3 Piece Conecut™ X	1/4" Impact


# STEP DRILLS

- Designed for HVAC, Electrical and sheet metal work.
- All major diameters, Conduit and Tapping with clearance sizes available.
- Straight, Spiral and Coated solutions for multiple material applications.
- Suitable for standard 3 flat drill chucks and 1/4" impact drivers.
- Split point technology for faster starts and secure drilling.



Available as individuals and in kits

# MULTICUT X™

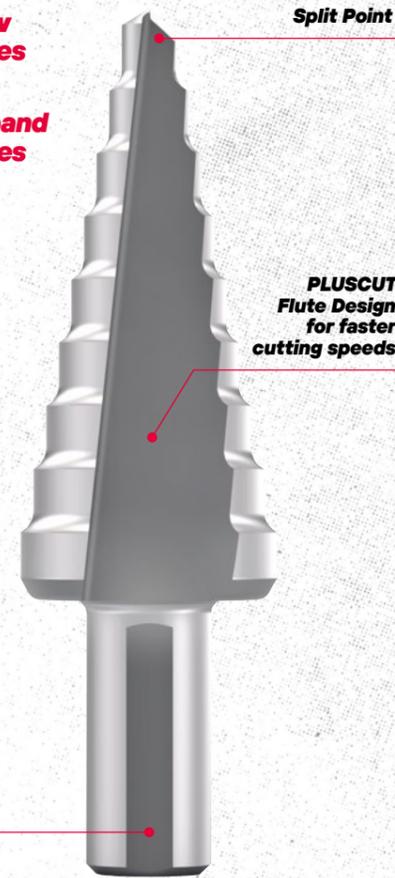

- Multicut™ custom dual flute design for cleaner faster cuts.
- Made from High Speed Steel for longer life.
- Nonslip 3 flat shanks.
- Available in all major diameter sizes across applications.

### Traditional 3 Flat Shank:

Product Code	Size Range	Steps	Shank Size	M.M.T*
MC412	4-12mm	9	6mm	5mm
MC420	4-20mm	9	10mm	4mm
MC430	4-30mm	14	10mm	4mm
MC636	6-36mm	11	10mm	3.5mm

\*Max Material Thickness

### Electrical 3 Flat Shank:

Product Code	Size Range	Steps	Shank Size	M.M.T*
MC535	5-35mm	13	13mm	3.5mm
MC1625	16, 20, 25mm	9	10mm	3.5mm
MC1632	16, 20, 25, 32mm	10	13mm	3.5mm
MCT1225	M12, M16, M20, M25	10	10mm	7mm
MCPG21	PG7 TO PG21	11	13mm	3mm
MCPG29	PG7 TO PG29	14	13mm	3mm

\*Max Material Thickness

### Suitable for Drilling:




### MULTICUT X™ Kits:

Product Code	Size Range mm	Description	Shank Type
MCKIT1	4-12, 4-20, 4-30mm	3 Piece Step Drill Multicut X™	3 Flat Shank
MCKIT2	12-25, 16-25, 16-32mm	3 Piece Step Drill Multicut X™	3 Flat Shank



# MULTICUT X<sup>TM</sup> SPIRAL

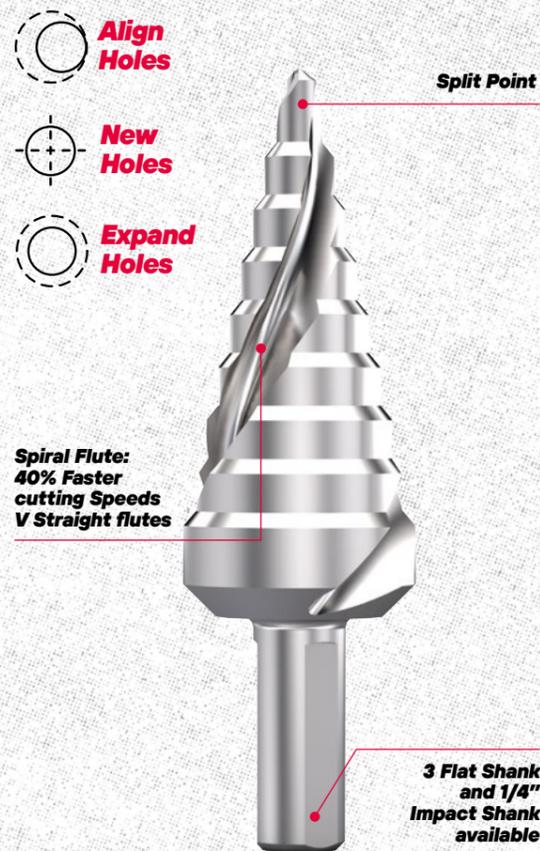

- Spiral Flute design for 40% faster cutting speeds.
- Multicut<sup>TM</sup> flute design for optimum tool performance.
- Minimal vibration and reduced torque requirements.
- Extend battery tool life with easier cutting spiral action.

### Traditional 3 Flat Shank:

Product Code	Size Range	Steps	Shank Size	M.M.T*
MCS412	4-12mm	9	6mm	6mm
MCS420	4-20mm	9	8mm	4.5mm
MCS430	4-30mm	14	10mm	4.5mm
MCS636	6-36mm	11	10mm	3.5mm

\*Max Material Thickness

### Electrical 3 Flat Shank:

Product Code	Size Range	Steps	Shank Size	M.M.T*
MCS535	5-35mm	13	10mm	3mm
MCS1632	16, 20, 25, 32mm	10	13mm	4.5mm

\*Max Material Thickness

### 1/4" Impact Shank:

Product Code	Size Range	Steps	Shank Size	M.M.T*
MCS412IMP	4-12mm	9	1/4"	5.5mm
MCS420IMP	4-20mm	9	1/4"	4mm
MCS430IMP	4-30mm	14	1/4"	4mm

\*Max Material Thickness

### MULTICUT X SPIRAL<sup>TM</sup> Kit:

Product Code	Size Range mm	Description	Shank Type
MCSKIT1	4-12, 4-20, 4-30mm	3 Piece Step Drill Multicut X Spiral <sup>TM</sup>	3 Flat Shank
MCSKIT2	4-12, 4-20, 4-30mm	3 Piece Step Drill Multicut X Spiral <sup>TM</sup>	1/4" Impact

### Suitable for Drilling:



# MULTICUT X<sup>+</sup><sup>TM</sup>



- Unique X+ Coating exclusive to Rotabroach<sup>TM</sup> High Performance tooling lines.
- Extend tool life by up to 70% longer compared to other Step Drills.
- Minimal vibration and reduced torque requirement.
- Extend battery tool life with easier cutting spiral action.

### 1/4" Impact Shank:

Product Code	Size Range	Steps	M.M.T*
MCSP412IMP	4-12mm	9	5.5mm
MCSP420IMP	4-20mm	9	4mm
MCSP430IMP	4-30mm	14	4mm

\*Max Material Thickness

### MULTICUT X<sup>+</sup><sup>TM</sup> Kit:

Product Code	Size Range mm	Description	Shank Type
MCSPKIT1	4-12, 4-20, 4-30mm	3 Piece Step Drill Multicut X <sup>+</sup> <sup>TM</sup>	1/4" Impact

### Suitable for Drilling:



# MINI CUTTERS & TCT HOLESAWS

- Mini Cutters & TCT Holesaws are designed for speed & life improvements.
- Cut 3x Faster than Twist Drills with Mini Cutters.
- Clean Burr Free holes every time.
- TCT Holesaws are designed for making easy work of stainless steel.
- Low power consumption cutting tools, ideal for site.


**TCT**



**3 FLAT SHANK**

**HSS**


**3x**  
FASTER TO CUT V TWIST DRILLS



**COMBI Ready**

**10x**  
LIFE OF BI-METAL HOLESAWS

# STORM MINI CUTTERS

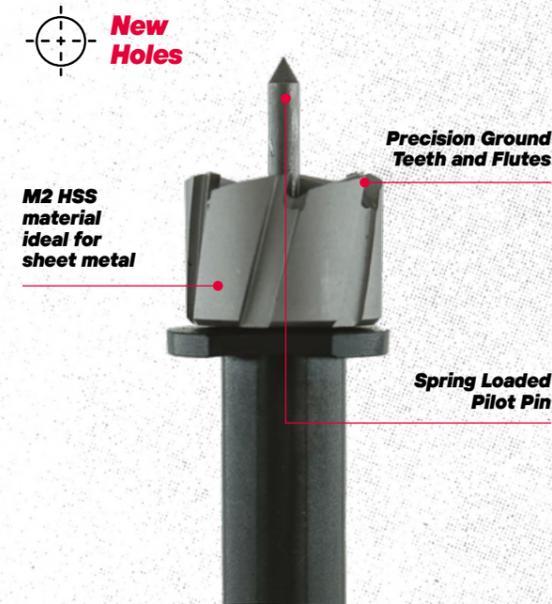

- Drill Clean Burr Free Holes, ideal for Sheet Metal.
- Ideal for Aerospace and Vehicle maintenance.
- Low battery power consumption.
- Cutting depths from 6.4mm up to 20mm / 12.7mm +20mm diameter.
- Size range from 6mm to 25mm.

**Suitable for Drilling:**



Dia (mm)	Part Number	D.O.C (mm)	Arbor Required
6mm	RCM060	6.4mm	RA116/ RA117
7mm	RCM070	6.4mm	RA116/ RA117
8mm	RCM080	6.4mm	RA116/ RA117
9mm	RCM090	6.4mm	RA116/ RA117
10mm	RCM100	6.4mm	RA116/ RA117
11mm	RCM110	6.4mm	RA116/ RA117
12mm	RCM120	6.4mm	RA116/ RA117
13mm	RCM130	6.4mm	RA116/ RA117
14mm	RCM140	6.4mm	RA116/ RA117
15mm	RCM150	6.4mm	RA116/ RA117
16mm	RCM160	6.4mm	RA116/ RA117
17mm	RCM170	6.4mm	RA116/ RA117
18mm	RCM180	6.4mm	RA116/ RA117
19mm	RCM190	6.4mm	RA116/ RA117
20mm	RCM200	6.4mm	RA116/ RA117
21mm	RCM210	12.7mm	RA118
22mm	RCM220	12.7mm	RA118
23mm	RCM230	12.7mm	RA118
24mm	RCM240	12.7mm	RA118
25mm	RCM250	12.7mm	RA118

**STORM Mini Cutter Kits:**

Product Code	Size Range mm	Description	Shank Type
RK603	8, 10, 12, 14, 16, 18, 20mm	7 Piece Mini Cutter Kit Including 1/2" Arbor & Pin	3 Flat Shank
RK604	8, 10, 12, 14, 16, 18, 20mm	7 Piece Mini Cutter Kit Including 3/8" Arbor & Pin	3 Flat Shank

**3x**  
FASTER TO CUT V TWIST DRILLS



**COMBI Ready**



**3 FLAT SHANK**

**HSS**  
High Speed STEEL




**6mm to 25mm Diameter**



**6.4 to 12mm Depth**

# TCT HOLESAWS

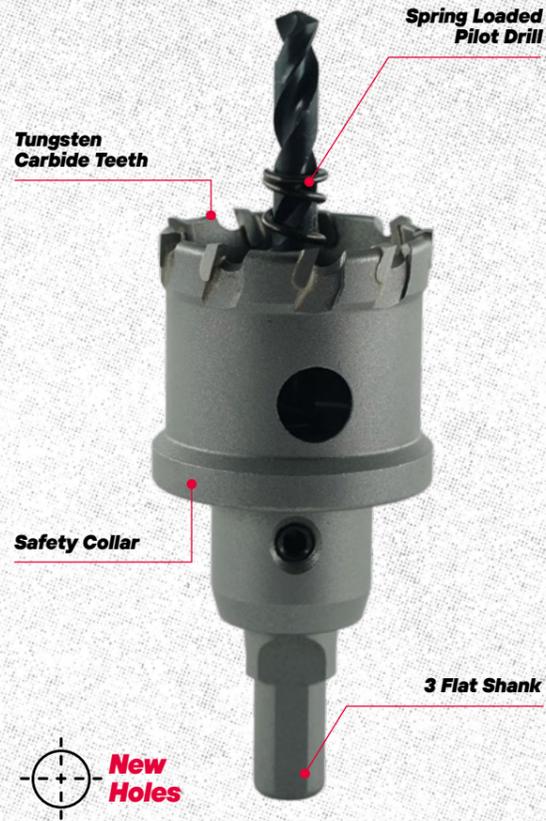

### TCT Holesaw Kit:

Product Code	Size Range mm	Description	Shank Type
RHSKIT1	14, 16, 18, 20, 22mm	5 Piece TCT Holesaw Kit	3 Flat Shank

### Spare Drills and Springs:

SKU	Description
RD40095	Drill
RD40094	Spring
RD40093	Grub Screw

Spring LOADED

COMBI Ready

SAFETY Collar

MAX Dia 106mm

MAX Depth 50mm

3 FLAT SHANK

Dia (mm)	25mm D.O.C	50mm D.O.C	Dia (mm)	25mm D.O.C	50mm D.O.C
14mm	RHS1425		61mm	RHS6125	RHS6150
15mm	RHS1525		62mm	RHS6225	RHS6250
16mm	RHS1625		63mm	RHS6325	RHS6350
17mm	RHS1725		64mm	RHS6425	RHS6450
18mm	RHS1825		65mm	RHS6525	RHS6550
19mm	RHS1925	RHS1950	66mm	RHS6625	
20mm	RHS2025	RHS2050	67mm	RHS6725	
21mm	RHS2125	RHS2150	68mm	RHS6825	
22mm	RHS2225	RHS2250	69mm	RHS6925	
23mm	RHS2325	RHS2350	70mm	RHS7025	
24mm	RHS2425	RHS2450	71mm	RHS7125	
25mm	RHS2525	RHS2550	72mm	RHS7225	RHS7250
26mm	RHS2625	RHS2650	73mm	RHS7325	RHS7350
27mm	RHS2725	RHS2750	74mm	RHS7425	
28mm	RHS2825	RHS2850	75mm	RHS7525	
29mm	RHS2925	RHS2950	76mm	RHS7625	
30mm	RHS3025	RHS3050	77mm	RHS7725	
31mm	RHS3125	RHS3150	78mm	RHS7825	
32mm	RHS3225	RHS3250	79mm	RHS7925	
33mm	RHS3325	RHS3350	80mm	RHS8025	
34mm	RHS3425	RHS3450	81mm	RHS8125	
35mm	RHS3525	RHS3550	82mm	RHS8225	
36mm	RHS3625	RHS3650	83mm	RHS8325	
37mm	RHS3725	RHS3750	84mm	RHS8425	
38mm	RHS3825	RHS3850	85mm	RHS8525	
39mm	RHS3925	RHS3950	86mm	RHS8625	
40mm	RHS4025	RHS4050	87mm	RHS8725	
41mm	RHS4125	RHS4150	88mm	RHS8825	
42mm	RHS4225	RHS4250	89mm	RHS8925	
43mm	RHS4325	RHS4350	90mm	RHS9025	RHS9050
44mm	RHS4425	RHS4450	91mm	RHS9125	
45mm	RHS4525	RHS4550	92mm	RHS9225	
46mm	RHS4625	RHS4650	93mm	RHS9325	
47mm	RHS4725	RHS4750	94mm	RHS9425	
48mm	RHS4825	RHS4850	95mm	RHS9525	RHS9550
49mm	RHS4925	RHS4950	96mm	RHS9625	
50mm	RHS5025	RHS5050	97mm	RHS9725	
51mm	RHS5125	RHS5150	98mm	RHS9825	
52mm	RHS5225	RHS5250	99mm	RHS9925	
53mm	RHS5325	RHS5350	100mm	RHS10025	RHS10050
54mm	RHS5425	RHS5450	101mm	RHS10125	
55mm	RHS5525	RHS5550	102mm	RHS10225	
56mm	RHS5625	RHS5650	103mm	RHS10325	
57mm	RHS5725	RHS5750	104mm	RHS10425	
58mm	RHS5825	RHS5850	105mm	RHS10525	
59mm	RHS5925	RHS5950	106mm	RHS10625	
60mm	RHS6025	RHS6050			

The recommended max cutting depth for hand held drills is 15mm.



### Suitable for Drilling:



- Ideal for Stainless Steel and thicker gauge material in steel girders up to 25mm thick.
- 10x Longer Life & 3x Faster Cutting Speeds than Bi-metal Holesaws.
- Spring loaded and supplied with arbor and drill bit as standard.
- Safety collar for user safety and tool protection.
- Size range from 14mm to 106mm (25mm & 50mm Depth of Cut Options).



Available as individuals and in kits

# HSS FABRICATION TOOLING

- Essential tooling for Fabrication applications.
- HSS Countersinks available in 3 Flute & 5 Flute versions.
- HSS Hand and Machine Taps for Metric ISO applications.
- HEXI-BIT tooling platform for Metal and Wood working.



# HSS

Available as individuals and in kits

High Speed STEEL

# COUNTERSINKS

3 Flute design  
Self Centering



M2 HSS Material:  
Ideal for Metal

Standard  
Shank Design



Countersink

Suitable for Drilling:



RANGE OF STEEL



COPPER/BRASS



ALUMINIUM



PLASTIC

5 Flute design  
Self Centering



M2 HSS Material:  
Ideal for Metal

Standard  
Shank Design

## COUNTERSINKS 3 Flute:

Product Code	Nominal Diameter (mm)	Shank Size (mm)	Angle	Material Type
CS36	6.3mm	5mm	90°	HSS M2AL
CS38	8.3mm	6mm	90°	HSS M2AL
CS310	10.4mm	6mm	90°	HSS M2AL
CS312	12.4mm	8mm	90°	HSS M2AL
CS316	16.5mm	10mm	90°	HSS M2AL
CS320	20.5mm	10mm	90°	HSS M2AL
CS325	25mm	10mm	90°	HSS M2AL
CS328	28mm	12mm	90°	HSS M2AL
CS331	31mm	12mm	90°	HSS M2AL

## COUNTERSINK 3 flute Kit:

Product Code	Size Range mm	Description	Shank Type
CS3KIT	6.3, 8.3, 10.4, 12.4, 16.5, 20.5mm	6 Piece 3 Flute 90° Countersink Set	Standard Shank

## COUNTERSINKS 5 Flute:

Product Code	Nominal Diameter (mm)	Shank Size (mm)	Angle	Material Type
CS58	8mm	5mm	90°	HSS M2AL
CS512	12mm	6.35mm	90°	HSS M2AL
CS516	16mm	8mm	90°	HSS M2AL
CS520	20mm	10mm	90°	HSS M2AL

## COUNTERSINK 5 flute Kit:

Product Code	Size Range mm	Description	Shank Type
CS5KIT	8, 12, 16, 21mm	4 Piece 5 Flute 90° Countersink Set	Standard Shank

- M2 HSS Countersinks.
- Available as 3 Flute & 5 Flute.
- All major countersinking sizes.
- Available as singles and sets.

**HSS**  
High Speed STEEL

Available In Kits

ROUND SHANKS

# HEXI-BIT

- Core size diameters ideal for Metal and Wood working applications.
- Compact length tools, ideal for working in small spaces.

- Quick Change 1/4" IMPACT HEX shank system for drilling, expanding, deburring, and countersinking.
- Available as singles and multi-tool sets.



## HEXI-BIT Range:

Product Type	Product Code	Product Description	Diameter Range (mm)	M.M.T*
Cone Drill	HBCC314	Hexi-bit 3-14mm Cone Drill	3-14mm	2mm
	HBCC620	Hexi-bit 6-20mm Cone Drill	6-20mm	2mm
Twist Drills	HBSD25	Hexi-bit 2.5mm Twist Drill	2.5mm / M3 Thread	14mm
	HBSD33	Hexi-bit 3.3mm Twist Drill	3.3mm / M4 Thread	18mm
	HBSD4	Hexi-bit 4mm Twist Drill	4mm	18mm
	HBSD42	Hexi-bit 4.2mm Twist Drill	4.2mm / M5 Thread	20mm
	HBSD5	Hexi-bit 5mm Twist Drill	5mm / M6 Thread	26mm
	HBSD7	Hexi-bit 7mm Twist Drill	7mm	30mm
	HBSD85	Hexi-bit 8.5mm Twist Drill	8.5mm / M10 Thread	33mm
	HBSD95	Hexi-bit 9.5mm Twist Drill	9.5mm	38mm
Step Drills	HBSD4121	Hexi-bit 4-12mm Step Drill	4, 6, 8, 10, 12mm	5mm
	HBSD4122	Hexi-bit 4-12mm Step Drill	4, 5, 6, 7, 8, 9, 10, 11, 12mm	5mm
	HBSD513	Hexi-bit 5-13mm Step Drill	5, 7, 9, 11, 13mm	5mm
	HBSD820	Hexi-bit 8-20mm Step Drill	8, 10, 12, 14, 16, 18, 20mm	5mm
	HBSD1020	Hexi-bit 10-20mm Step Drill	10, 11, 12, 13, 15, 16, 17, 18, 19, 20mm	5mm
Metal Countersinks	HBCS6	Hexi-bit 6mm 3 Flute 90° Countersink	6.3mm Head Diameter / M3 Screw Size	
	HBCS8	Hexi-bit 8mm 3 Flute 90° Countersink	8.3mm Head Diameter / M4 Screw Size	
	HBCS10	Hexi-bit 10mm 3 Flute 90° Countersink	10.4mm Head Diameter / M5 Screw Size	
	HBCS12	Hexi-bit 12mm 3 Flute 90° Countersink	12.4mm Head Diameter / M6 Screw Size	
	HBCS16	Hexi-bit 16mm 3 Flute 90° Countersink	16.5mm Head Diameter / M8 Screw Size	
	HBCS20	Hexi-bit 20mm 3 Flute 90° Countersink	20.5mm Head Diameter / M10 Screw Size	
	HBCS25	Hexi-bit 25mm 3 Flute 90° Countersink	25mm Head Diameter / M12 Screw Size	
Wood Countersinks	HBWCS10	Hexi-bit 10mm 5 Flute 90° Countersink	For Wood Screws: Upto & Including No10	
	HBWCS15	Hexi-bit 15mm 5 Flute 90° Countersink	For Wood Screws: Upto & Including No15	
	HBWCS20	Hexi-bit 20mm 5 Flute 90° Countersink	For Wood Screws: Upto & Including No20	
Deburrers	HBD28	Hexi-bit 2-8mm 90° Deburring cutter	Min & Max Cut : 2mm - 8mm	
	HBD513	Hexi-bit 5-13mm 90° Deburring cutter	Min & Max Cut : 5mm - 13mm	
	HBD720	Hexi-bit 7-20mm 90° Deburring cutter	Min & Max Cut : 7mm - 20mm	

\*Max Material Thickness

## Suitable for Drilling:



## HEXI-BIT Kits:

Product Code	Size Range mm	Description	Shank Type
HBKIT1	Metal Countersinks: 6, 8, 10, 12, 16, 20mm	Hexi-bit Metal 6 Piece Countersink Set	1/4" Impact
HBKIT2	Metal Countersinks: 12, 16 & 20mm Wood Countersinks: 10 & 15mm Deburring Cutter: 5-13mm	Hexi-bit Metal and Wood 6 Piece Countersink Deburring Set	1/4" Impact
HBKIT3	Metal Countersink: 16mm Wood Countersink: 15mm Deburring Cutter: 5-13mm Step Drills: 5-13mm & 8-20mm Cone Drill: 3-14mm	Hexi-bit Metal, Wood Countersinking, Step Drill, Deburring & Cone Drill 6 Piece Kit	1/4" Impact
HBKIT4	Metal Countersink: 12 & 16mm Deburring Cutter: 5-13mm Step Drills: 5-13mm & 8-20mm Cone Drill: 3-14mm	Hexi-bit Metal Countersinking, Deburring, Step & Cone Drill 6 Piece Kit.	1/4" Impact
HBKIT5	Metal Countersink: 16mm Wood Countersink: 15mm Step Drills: 4-12mm, 5-13mm & 8-20mm Cone Drill: 3-14mm	Hexi-bit Metal & Wood Countersinks with Step & Cone Drills 6 Piece Kit	1/4" Impact
HBKIT6	Metal Countersink: 12mm, 16mm Step Drills: 4-12mm, 5-13mm & 8-20mm Cone Drill: 3-14mm	Hexi-bit Step and Cone Drill with Metal Countersinks 6 Piece Kit	1/4" Impact



# THREADING



Hand      Spiral Flute      Spiral Point

- HSS Hand & Machine Taps from M2 material.
- Original design since 1954 for the best results.
- Blue Max surface treated for longer life.
- ISO Metric thread sizes only.
- Available as individuals & sets.



Suitable for:



Thread

## METRIC COARSE Hand Taps:

Product Code	Product Description	Thread Size	Standard	Type
THT3MP	M3 x 0.50 Plug Hand Tap	M3 x 0.50	ISO	Plug
THT3MS	M3 x 0.50 Second Hand Tap	M3 x 0.50	ISO	Second
THT3MT	M3 x 0.50 Taper Hand Tap	M3 x 0.50	ISO	Taper
THT3MSET	M3 x 0.50 Hand Tap Set of 3	M3 x 0.50	ISO	Set of 3 - Taper, Second & Plug
THT4MP	M4 x 0.70 Plug Hand Tap	M4 x 0.70	ISO	Plug
THT4MS	M4 x 0.70 Second Hand Tap	M4 x 0.70	ISO	Second
THT4MT	M4 x 0.70 Taper Hand Tap	M4 x 0.70	ISO	Taper
THT4MSET	M4 x 0.70 Hand Tap Set of 3	M4 x 0.70	ISO	Set of 3 - Taper, Second & Plug
THT5MP	M5 x 0.80 Plug Hand Tap	M5 x 0.80	ISO	Plug
THT5MS	M5 x 0.80 Second Hand Tap	M5 x 0.80	ISO	Second
THT5MT	M5 x 0.80 Taper Hand Tap	M5 x 0.80	ISO	Taper
THT5MSET	M5 x 0.80 Hand Tap Set of 3	M5 x 0.80	ISO	Set of 3 - Taper, Second & Plug
THT6MP	M6 x 1.0 Plug Hand Tap	M6 x 1.0	ISO	Plug
THT6MS	M6 x 1.0 Second Hand Tap	M6 x 1.0	ISO	Second
THT6MT	M6 x 1.0 Taper Hand Tap	M6 x 1.0	ISO	Taper
THT6MSET	M6 x 1.0 Hand Tap Set of 3	M6 x 1.0	ISO	Set of 3 - Taper, Second & Plug
THT8MP	M8 x 1.25 Plug Hand Tap	M8 x 1.25	ISO	Plug
THT8MS	M8 x 1.25 Second Hand Tap	M8 x 1.25	ISO	Second
THT8MT	M8 x 1.25 Taper Hand Tap	M8 x 1.25	ISO	Taper
THT8MSET	M8 x 1.25 Hand Tap Set of 3	M8 x 1.25	ISO	Set of 3 - Taper, Second & Plug
THT10MP	M10 x 1.5 Plug Hand Tap	M10 x 1.5	ISO	Plug
THT10MS	M10 x 1.5 Second Hand Tap	M10 x 1.5	ISO	Second
THT10MT	M10 x 1.5 Taper Hand Tap	M10 x 1.5	ISO	Taper
THT10MSET	M10 x 1.5 Hand Tap Set of 3	M10 x 1.5	ISO	Set of 3 - Taper, Second & Plug

## METRIC COARSE Hand Taps (Continued):

Product Code	Product Description	Thread Size	Standard	Type
THT12MP	M12 x 1.75 Plug Hand Tap	M12 x 1.75	ISO	Plug
THT12MS	M12 x 1.75 Second Hand Tap	M12 x 1.75	ISO	Second
THT12MT	M12 x 1.75 Taper Hand Tap	M12 x 1.75	ISO	Taper
THT12MSET	M12 x 1.75 Hand Tap Set of 3	M12 x 1.75	ISO	Set of 3 - Taper, Second & Plug
THT14MP	M14 x 2.00 Plug Hand Tap	M14 x 2.00	ISO	Plug
THT14MS	M14 x 2.00 Second Hand Tap	M14 x 2.00	ISO	Second
THT14MT	M14 x 2.00 Taper Hand Tap	M14 x 2.00	ISO	Taper
THT14MSET	M14 x 2.00 Hand Tap Set of 3	M14 x 2.00	ISO	Set of 3 - Taper, Second & Plug
THT16MP	M16 x 2.00 Plug Hand Tap	M16 x 2.00	ISO	Plug
THT16MS	M16 x 2.00 Second Hand Tap	M16 x 2.00	ISO	Second
THT16MT	M16 x 2.00 Taper Hand Tap	M16 x 2.00	ISO	Taper
THT16MSET	M16 x 2.00 Hand Tap Set of 3	M16 x 2.00	ISO	Set of 3 - Taper, Second & Plug
THT18MP	M18 x 2.50 Plug Hand Tap	M18 x 2.50	ISO	Plug
THT18MS	M18 x 2.50 Second Hand Tap	M18 x 2.50	ISO	Second
THT18MT	M18 x 2.50 Taper Hand Tap	M18 x 2.50	ISO	Taper
THT18MSET	M18 x 2.50 Hand Tap Set of 3	M18 x 2.50	ISO	Set of 3 - Taper, Second & Plug
THT20MP	M20 x 2.50 Plug Hand Tap	M20 x 2.50	ISO	Plug
THT20MS	M20 x 2.50 Second Hand Tap	M20 x 2.50	ISO	Second
THT20MT	M20 x 2.50 Taper Hand Tap	M20 x 2.50	ISO	Taper
THT20MSET	M20 x 2.50 Hand Tap Set of 3	M20 x 2.50	ISO	Set of 3 - Taper, Second & Plug
THT24MP	M24 x 3.00 Plug Hand Tap	M24 x 3.00	ISO	Plug
THT24MS	M24 x 3.00 Second Hand Tap	M24 x 3.00	ISO	Second
THT24MT	M24 x 3.00 Taper Hand Tap	M24 x 3.00	ISO	Taper
THT24MSET	M24 x 3.00 Hand Tap Set of 3	M24 x 3.00	ISO	Set of 3 - Taper, Second & Plug

## METRIC SPIRAL FLUTE Machine Taps:

Product Code	Product Description	Thread Size	Standard	Type
TSF3M	M3 x 0.50 Spiral Flute Machine Tap	M3 x 0.50	ISO	Single
TSF4M	M4 x 0.70 Spiral Flute Machine Tap	M4 x 0.70	ISO	Single
TSF5M	M5 x 0.80 Spiral Flute Machine Tap	M5 x 0.80	ISO	Single
TSF6M	M6 x 1.00 Spiral Flute Machine Tap	M6 x 1.00	ISO	Single
TSF8M	M8 x 1.25 Spiral Flute Machine Tap	M8 x 1.25	ISO	Single
TSF10M	M10 x 1.50 Spiral Flute Machine Tap	M10 x 1.50	ISO	Single
TSF12M	M12 x 1.75 Spiral Flute Machine Tap	M12 x 1.75	ISO	Single

Manufactured from HSS M2AL Material, Spiral Flute machine taps are designed for threading blind holes, effectively preventing chips from remaining in the holes.

## METRIC SPIRAL POINT Machine Taps:

Product Code	Product Description	Thread Size	Standard	Type
TSP3M	M3 x 0.50 Spiral Point Machine Tap	M3 x 0.50	ISO	Single
TSP4M	M4 x 0.70 Spiral Point Machine Tap	M4 x 0.70	ISO	Single
TSP5M	M5 x 0.80 Spiral Point Machine Tap	M5 x 0.80	ISO	Single
TSP6M	M6 x 1.00 Spiral Point Machine Tap	M6 x 1.00	ISO	Single
TSP8M	M8 x 1.25 Spiral Point Machine Tap	M8 x 1.25	ISO	Single
TSP10M	M10 x 1.50 Spiral Point Machine Tap	M10 x 1.50	ISO	Single
TSP12M	M12 x 1.75 Spiral Point Machine Tap	M12 x 1.75	ISO	Single

Manufactured from HSS M2AL Material, Spiral point machine taps are designed for threading through holes in many types of materials.

# POWER TOOL ACCESSORY KITS

## CONECUT™ Kits:

Product Code	Size Range mm	Description	Shank Type
CCKIT1	3-14, 6-20, 16-30.6mm	3 Piece Conecut™ X	3 Flat Shank
CCKIT2	3-14, 6-20, 16-30.6mm	3 Piece Conecut™ X	1/4" Impact

## MULTICUT X™ Kits:

Product Code	Size Range mm	Description	Shank Type
MCKIT1	4-12, 4-20, 4-30mm	3 Piece Step Drill Multicut X™	3 Flat Shank
MCKIT2	12-25, 16-25, 16-32mm	3 Piece Step Drill Multicut X™	3 Flat Shank

## MULTICUT X SPIRAL™ Kit:

Product Code	Size Range mm	Description	Shank Type
MCSKIT1	4-12, 4-20, 4-30mm	3 Piece Step Drill Multicut X Spiral™	3 Flat Shank
MCSKIT2	4-12, 4-20, 4-30mm	3 Piece Step Drill Multicut X Spiral™	1/4" Impact

## MULTICUT X+™ Kit:

Product Code	Size Range mm	Description	Shank Type
MCSPKIT1	4-12, 4-20, 4-30mm	3 Piece Step Drill Multicut X+™	1/4" Impact

## STORM Mini Cutter Kits:

Product Code	Size Range mm	Description	Shank Type
RK603	8, 10, 12, 14, 16, 18, 20mm	7 Piece Mini Cutter Kit Including 1/2" Arbor & Pin	3 Flat Shank
RK604	8, 10, 12, 14, 16, 18, 20mm	7 Piece Mini Cutter Kit Including 3/8" Arbor & Pin	3 Flat Shank

## TCT Holesaw Kit:

Product Code	Size Range mm	Description	Shank Type
RHSKIT1	14, 16, 18, 20, 22mm	5 Piece TCT Holesaw Kit	3 Flat Shank

## COUNTERSINK 3 flute Kit:

Product Code	Size Range mm	Description	Shank Type
CS3KIT	6.3, 8.3, 10.4, 12.4, 16.5, 20.5mm	6 Piece 3 Flute 90° Countersink Set	Standard Shank

## COUNTERSINK 5 flute Kit:

Product Code	Size Range mm	Description	Shank Type
CS5KIT	8, 12, 16, 21mm	4 Piece 5 Flute 90° Countersink Set	Standard Shank

## Hand Tap Sets:

Product Code	Thread Size	Description	Shank Type
THT3MSET	M3 x 0.50	3 Piece Hand Tap Set	Hand Tap
THT4MSET	M4 x 0.70	3 Piece Hand Tap Set	Hand Tap
THT5MSET	M5 x 0.80	3 Piece Hand Tap Set	Hand Tap
THT6MSET	M6 x 1.0	3 Piece Hand Tap Set	Hand Tap
THT8MSET	M8 x 1.25	3 Piece Hand Tap Set	Hand Tap
THT10MSET	M10 x 1.50	3 Piece Hand Tap Set	Hand Tap
THT12MSET	M12 x 1.75	3 Piece Hand Tap Set	Hand Tap
THT14MSET	M14 x 2.00	3 Piece Hand Tap Set	Hand Tap
THT16MSET	M16 x 2.00	3 Piece Hand Tap Set	Hand Tap
THT18MSET	M18 x 2.50	3 Piece Hand Tap Set	Hand Tap
THT20MSET	M20 x 2.50	3 Piece Hand Tap Set	Hand Tap
THT24MSET	M24 x 3.00	3 Piece Hand Tap Set	Hand Tap

## HEXI-BIT Kits:

Product Code	Size Range mm	Description	Shank Type
HBKIT1	Metal Countersinks: 6, 8, 10, 12, 16, 20mm	Hexi-bit Metal 6 Piece Countersink Set	1/4" Impact
HBKIT2	Metal Countersinks: 12, 16 & 20mm Wood Countersinks: 10 & 15mm Deburring Cutter: 5-13mm	Hexi-bit Metal and Wood 6 Piece Countersink Deburring Set	1/4" Impact
HBKIT3	Metal Countersink: 16mm Wood Countersink: 15mm Deburring Cutter: 5-13mm Step Drills: 5-13mm & 8-20mm Cone Drill: 3-14mm	Hexi-bit Metal, Wood Countersinking, Step Drill, Deburring & Cone Drill 6 Piece Kit	1/4" Impact
HBKIT4	Metal Countersink: 12 & 16mm Deburring Cutter: 5-13mm Step Drills: 5-13mm & 8-20mm Cone Drill: 3-14mm	Hexi-bit Metal Countersinking, Deburring, Step & Cone Drill 6 Piece Kit.	1/4" Impact
HBKIT5	Metal Countersink: 16mm Wood Countersink: 15mm Step Drills: 4-12mm, 5-13mm & 8-20mm Cone Drill: 3-14mm	Hexi-bit Metal & Wood Countersinks with Step & Cone Drills 6 Piece Kit	1/4" Impact
HBKIT6	Metal Countersink: 12mm, 16mm Step Drills: 4-12mm, 5-13mm & 8-20mm Cone Drill: 3-14mm	Hexi-bit Step and Cone Drill with Metal Countersinks 6 Piece Kit	1/4" Impact



**The ORIGINAL NAME in  
Metal Cutting Technology,  
this is ROTABROACH™.**



**POWER To  
Cut Metal.™**

# POWER To Cut Metal.™

***Rotabroach***™

**BURGESS ROAD, SHEFFIELD S9 3WD**

**TEL: +44 (0)114 221 2510**

**EMAIL: SALES@OSLCT.CO.UK**

**WEB: ROTABROACH.CO.UK**

Catalogue Version 7.