T4



Universal light-duty fixing for anchoring in hollow materials.


TECHNICAL DATA

Plug material:	polyamide 6, grey color RAL 7035.
Screw material:	Carbon steel, treated with zinc-plating Cr^{3+} ≥5µm thick
Installation temperature:	-5°C÷ +40°C
Working temperature:	-40°C ÷ +80°C

BUILDING MATERIALS



INSTALLATION METHOD

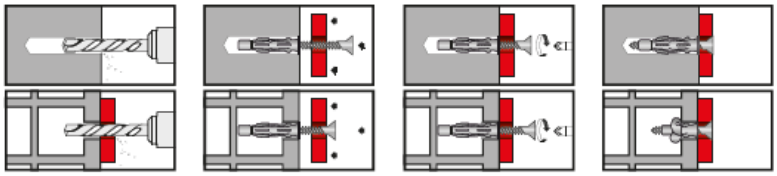

CHARACTERISTICS

- The 4 expansion sleeves guarantee a good flexibility on hollow materials and a good anchorage by friction grip in solid materials.
- Anti-rotation fins placed at the base of the anchor for an excellent blocking.
- Closed tip for an easy insertion of the plug into the hole.

BENEFITS

- Perfect application on different building materials.
- Exceptional high load capacity, especially on hollow materials.
- Functionality, ease and safety of installation.
- Suitable for many types of screws.