



NEW

TABLE SAWS

evolution

R255
TBL

Without Stand

R255
TBLX

With Stand

255MM TABLE SAW WITH MULTI-MATERIAL CUTTING TECHNOLOGY

 1650W 110V = 1600W	 255MM TCT MULTI-MATERIAL	 85MM MAX DEPTH AT 90°	 58MM MAX DEPTH AT 45°
 3050RPM NO LOAD SPEED	 21.2KG LIGHTWEIGHT	 577 x 570MM CAST ALUMINIUM TABLE	 650MM RIP CAPACITY TO RIGHT



Micro-adjustable rack and pinion fence ensures optimal precision and accuracy.

New mitre gauge sled with industry standard mitre gauge slots, paired with supplied **sliding mitre fence** for easy and versatile cuts.

Multi-material 24-tooth 255mm blade included. Cuts wood, steel, PVC, wood with embedded nails, & more!

Tool-less parallel blade adjustment sets the blade at 90° effortlessly and quickly.

Micro height adjustable metal throat plate.

Sliding table extension with dual-lock fence to help support and align large pieces of material.

Easy height and bevel adjustment.
Bevel up to 45° and cut up to 85mm.

Active dust extraction collection.
Improved dust collection plus elbow joint adaptor to keep the workspace clean and tidy.

On-board accessory and tool storage.
Push stick included for even safer cutting.

R255
TBLX

**INCLUDES FOLDING
TABLE SAW STAND**



ACCURATE • RELIABLE • POWERFUL

evOLUTION®









R255
TBL +

Without Stand

R255
TBLX +

With Stand

255MM TABLE SAW WITH MULTI-MATERIAL CUTTING TECHNOLOGY



UPGRADE TO EVEN BETTER

Ready for more? Experience the ultimate cutting performance with the R255TBL+ and R255TBLX+



Top clamp included for **extra** safety & accuracy.



Outfeed support bar increases the overall table size to support **even** larger pieces of material.



Multi-material 28-tooth 255mm blade included. Cuts wood, steel, PVC, wood with embedded nails, & more!



More power to get the job done quicker, plus soft start motor & blade brake.



Dual port dust extraction collects dust from above and below the blade.


R255
TBLX +

**INCLUDES FOLDING
TABLE SAW STAND**



ACCURATE • RELIABLE • POWERFUL

evOLUTION®

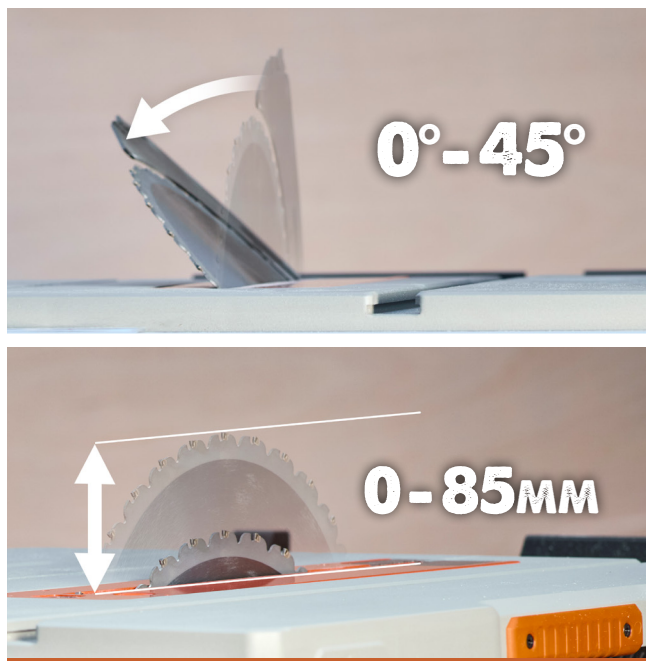



EXTRA WORKPIECE SUPPORT

Extendable outfeed support bar gives extra support behind the blade to stop the workpiece falling off the table.



EXTRA CLAMPING

Top clamp included to prevent your workpiece from moving during the cut for extra accuracy and safety.



EXTRA DUST EXTRACTION

Dual dust extraction collects dust from above and below the blade for optimum dust collection.



EXTRA POWER

Powerful 1800w (Vs 1650w) high-torque motor allows for fast rip cutting through heavy-duty materials including steel.

EXTRA FREEDOM

Long 3m power cable means you can position your table saw where you need it, near or far from the power outlet.

EXTRA SAFETY

High performance electronic blade brake quickly stops the blade for added safety. Ideal in emergency situation.

Soft start motor gradually increases the blade speed reducing stress on motor components & reducing the risk kickback on startup. It also eliminates startup current spike reducing the risk of tripping circuit breakers.



ALL MODELS AVAILABLE WITH OR WITHOUT FOLDING FRAME

R255
TBL



R255
TBLX



R255
TBL +



R255
TBLX +



Motor Power	1650w	1650w	1800W	1800W
No Load Speed	3050rpm	3050rpm	3050rpm	3050rpm
Product Weight	21.2kg	21.2kg	22.8kg	22.8kg
Blade Size	255mm	255mm	255mm	255mm
Blade Tooth Count	24T RAGE	24T RAGE	28T RAGE	28T RAGE
Bore Size	25.4mm	25.4mm	25.4mm	25.4mm
Max. Cutting Depth (0°)	85mm	85mm	85mm	85mm
Max. Cutting Depth (45°)	58mm	58mm	58mm	58mm
Max. Steel thickness	3mm	3mm	3mm	3mm
Table Size	577x570mm	577x570mm	577x570mm	577x570mm
Rip Capacity (Right)	653mm	653mm	653mm	653mm
Rip Capacity (Left)	371mm	371mm	371mm	371mm
Product Size (LxWxH)	695 x 653 x 340mm	695 x 653 x 910mm	730 x 653 x 340mm	730 x 653 x 910mm
Warranty	3 Years	3 Years	3 Years	3 Years
Cable Length	2m	2m	3m	3m
Soft Start	✗	✗	✓	✓
Overload Protection	✓	✓	✓	✓
Dust Pipe	✗	✗	✓	✓
Dust Port Elbow	✓	✓	✗	✗
Sliding Table Section	✓	✓	✓	✓
E-Brake	✗	✗	✓	✓
Outfeed Support	✗	✗	✓	✓
Top Clamp	✗	✗	✓	✓
Leg Assembly	✗	✓	✗	✓