


SKALAR[®] M42

The high-performer for large cross-sections

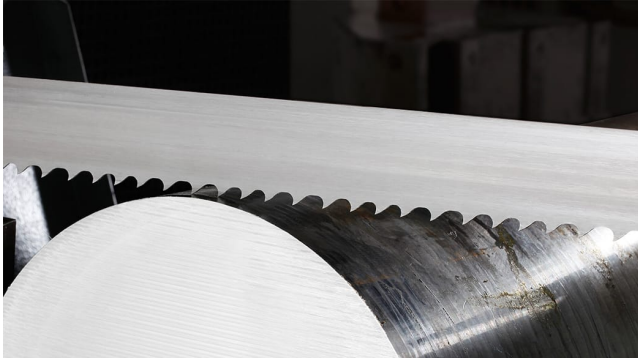

Product level 3

Hook tooth

Solid materials

Band width 27 x 0.9 - 80 x 1.6mm

Band width 1-1/16 x 0.035 - 3-1/8 x 0.063 Inch

Product Information

SKALAR[®] M42 – The high-performer for large cross-sections

Sawing tools often reach their limits, especially when cutting large cross-sections. This results in very long cutting times, early deflection and an early end of blade-life. Frequent blade changes result in high tool costs and production delays.

The SKALAR[®] M42 bimetal band saw blade cuts with considerably reduced cutting forces due to its intelligent cutting division, thus enabling a significant increase in productivity.

Application

- Large blocks in industrial production
- Especially for mixing programs with a large material mix
- Also for difficult-to-machine non-ferrous special alloys
- All metals up to a tensile strength of 1000 N/mm² can be used

Advantages

- Extremely high cutting rates even with large cross-sections and in continuous operation
- Short cutting time and lower cutting forces
- Smooth running and straight cutting surfaces
- Wide variety of materials to be machined
- Less frequent blade changes, higher machine availability and output

Features

- High productivity and efficiency due to specially designed cutting geometry
- Ground contour with specially matched tooth pitch
- M42 cutting edge with extra positive rake angle
- Special set for optimal chip division
- Stability increase in the backing material
- Excellent chip removal at contact lengths of 2000 mm

Note: This band saw blade is also available as **SKALAR[®] PREMIUM M42** with coating to further increase performance.

Technical Data

Dimensions		Tooth pitch in tpi					
Width x thickness							
mm	Inch	2.5 - 3.4	1.8 - 2.5	1.4 - 1.8	1.2 - 1.6	1 - 1.4	0.7 - 1
27 x 0.90	1-1/16 x 0.035	K					
34 x 1.10	1-3/8 x 0.042	K	K				
41 x 1.30	1-5/8 x 0.050	K	K	K			
54 x 1.30	2-1/8 x 0.050	K	K	K			
54 x 1.60	2-1/8 x 0.063	K	K	K	K	K	
67 x 1.60	2-5/8 x 0.063			K	K	K	K
80 x 1.60	3-1/8 x 0.063				K	K	K
Contact length	[mm]	100-220	180-350	300-600	400-700	500-1000	900-2000
	[Inch]	3.9-8.7	7.1-13.8	11.8-23.6	15.7-27.6	19.7-39.4	35.4-78.7

K = Hook tooth

Materials Overview



- Case-hardening steels, spring steels and ball-bearing steels
- Rust-proof and acid-resistant steels (ferretic)
- Nitrided steel, high-speed steel and tool steel
- Construction, deep-drawn and machining steels
- Carbon steels, and quenched and tempered steels
- Cast iron
- Aluminium / aluminium alloys
- Non-ferrous metals

**WIKUS-Sägenfabrik
Wilhelm H. Kullmann GmbH & Co. KG**

Melsunger Str. 30
34286 Spangenberg, germany

Tel.: +49 5663 500-0

www.wikus.de
info@wikus.de



© WIKUS-Sägenfabrik.

All rights reserved. Not to be reproduced in part or in whole. No responsibility is taken for the accuracy of this information. Despite the fact that WIKUS takes great care in assembling and constantly reviewing its data, the company assumes no liability or guarantees for the completeness, correctness or up to dated ness of the information provided. Pictures may differ from the original. The product range may change after the brochure has been printed. The trademarks designated with the "®" are registered trademarks by WIKUS-Sägenfabrik Wilhelm H. Kullmann GmbH & Co. KG unless otherwise indicated. These trademarks are protected in Germany, the European Union and many other countries worldwide. Printed in Germany, 2026-09-18

Presented by:



Van Maele Benelux

Tenhovestraat 22
8700 Tielt

Phone:0032 51/42.78.00

www.vanmaelebenelux.be
info@vanmaelebenelux.be



Innovative precision tools designed
and manufactured in Spangenberg,
Germany